




CATRIN 05 - CATRIN 02
RC.MONA



J1BN_SC5



MO_00AC_S

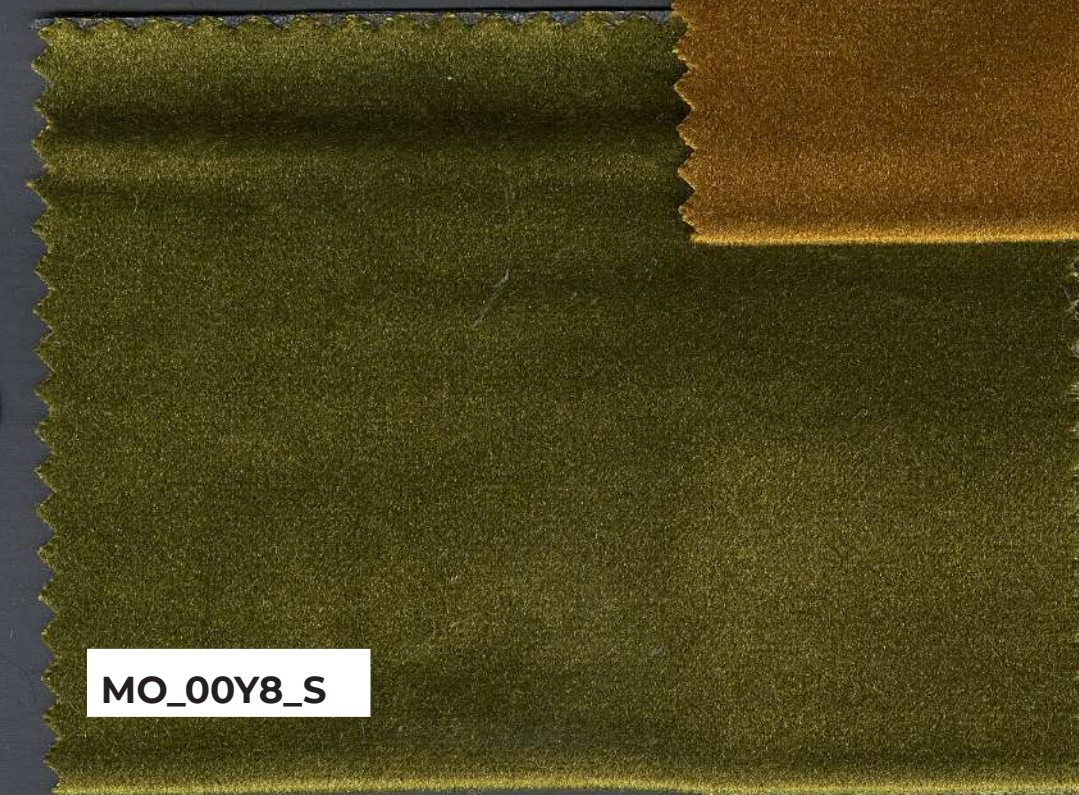


MO_00Y8_S



MO_00C2_S




J1J1_SC2

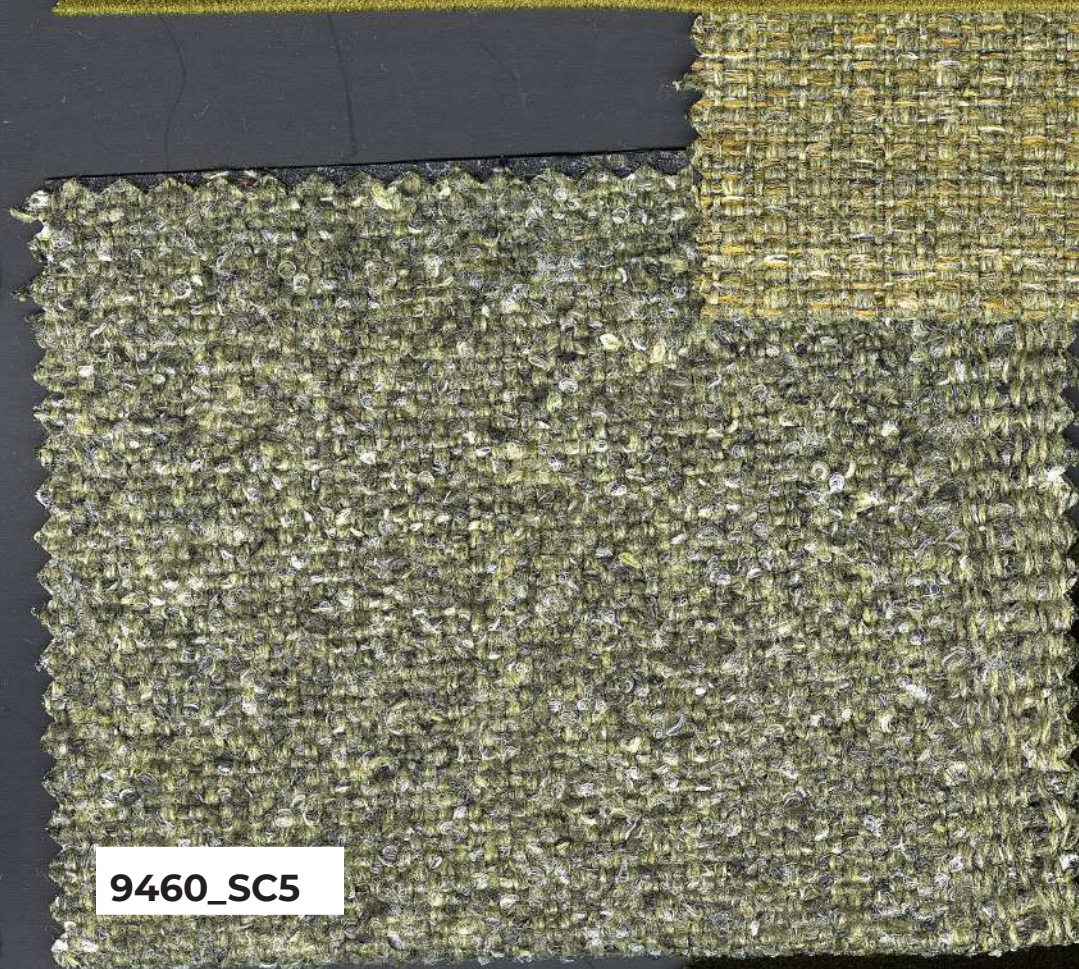


9460_SC5




94J1_SC2

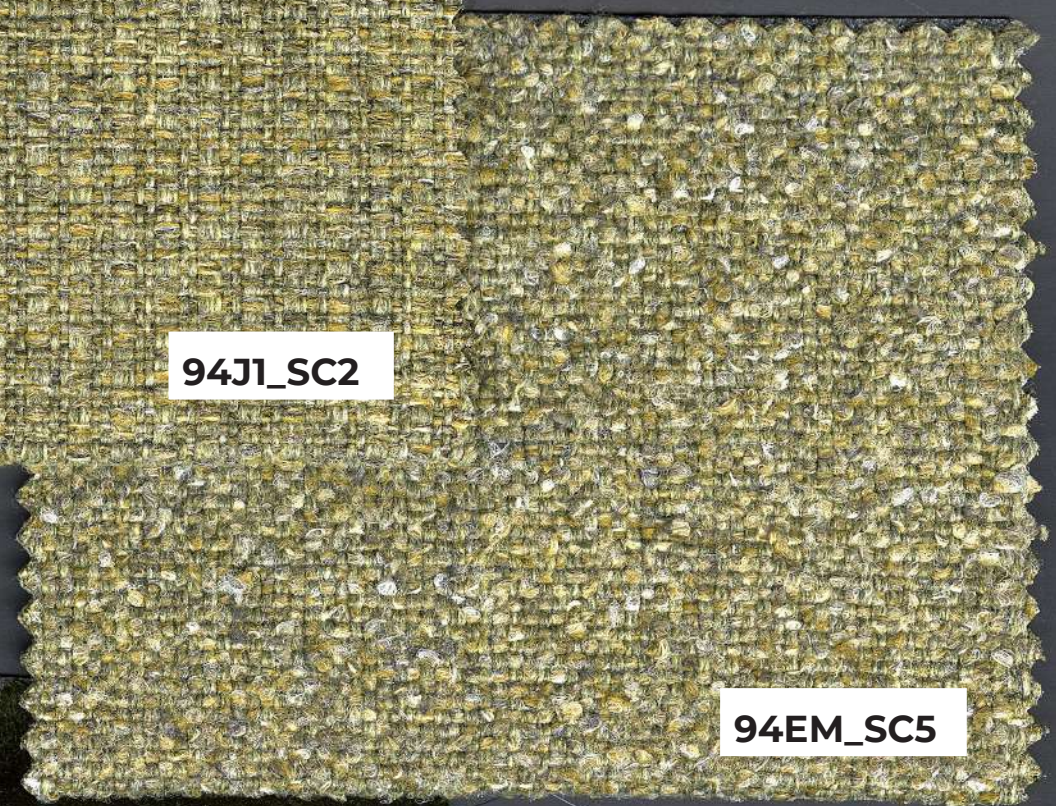


94EM_SC5

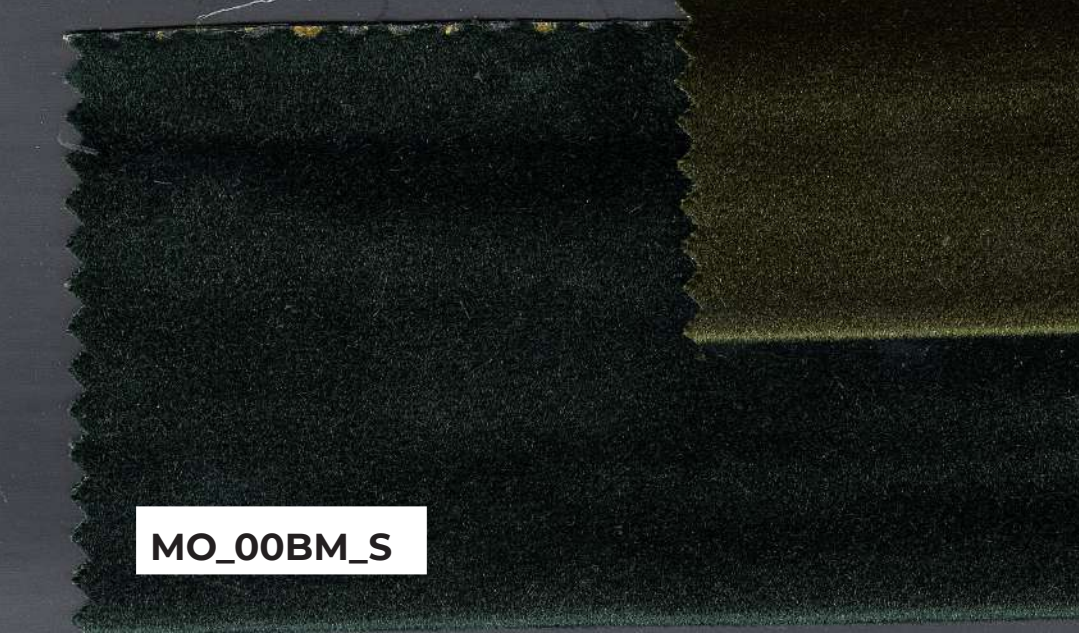


MO_00BM_S

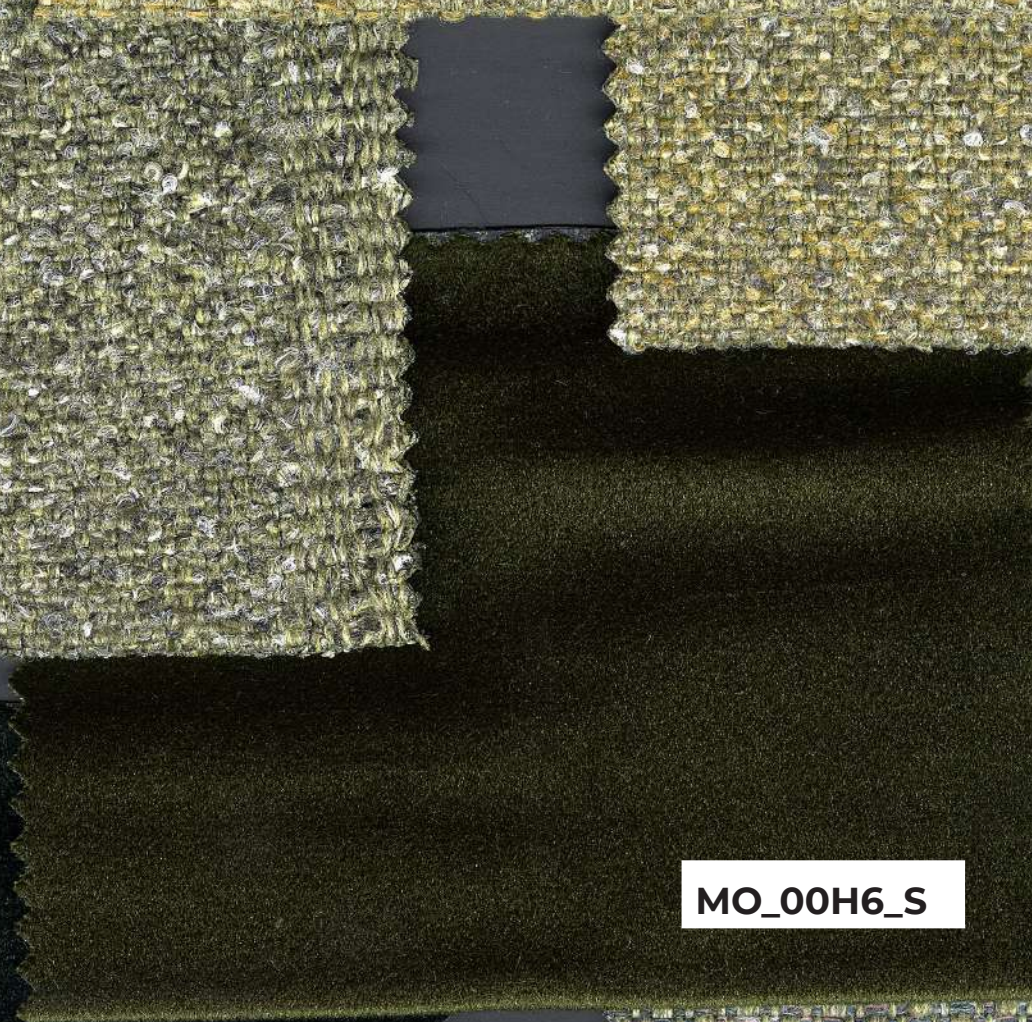

MO_00H6_S

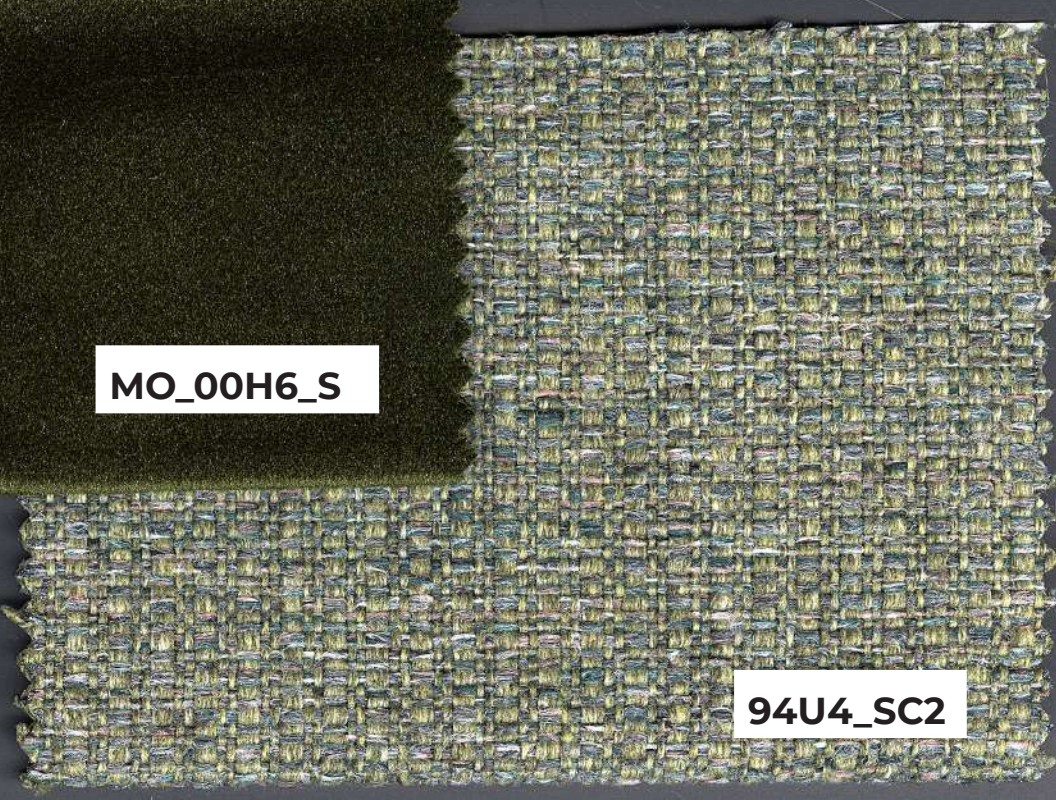


94U4_SC2

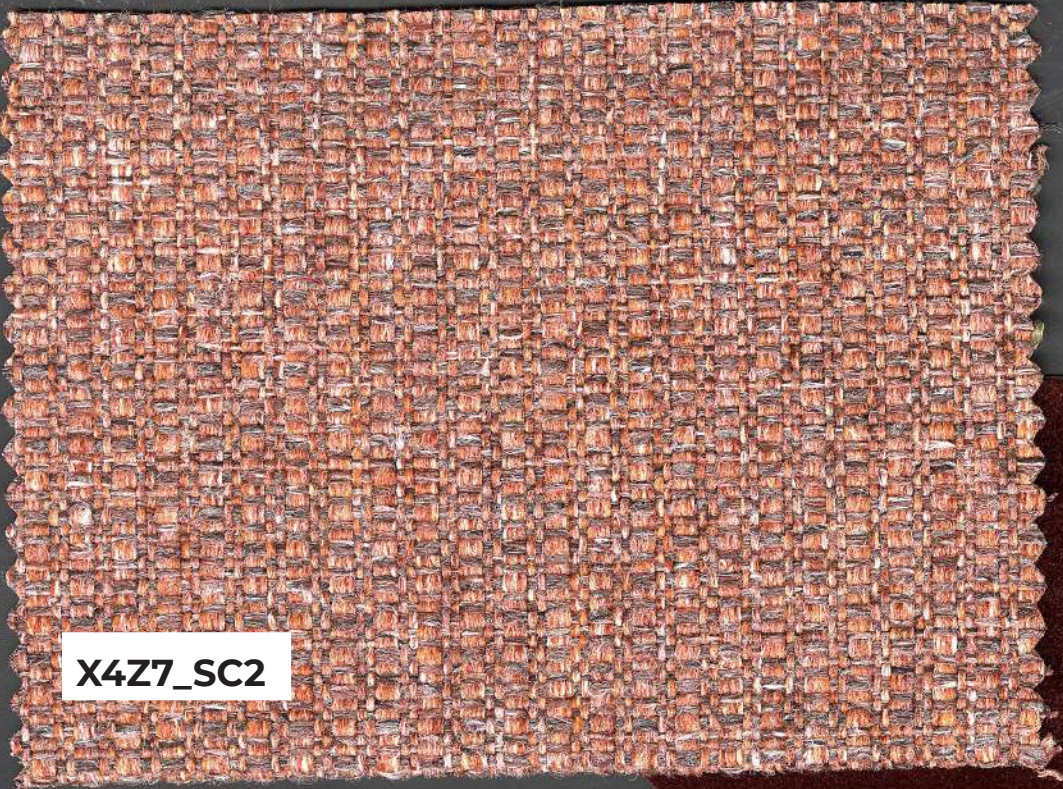

X4Z7_SC2




MO_0062_S

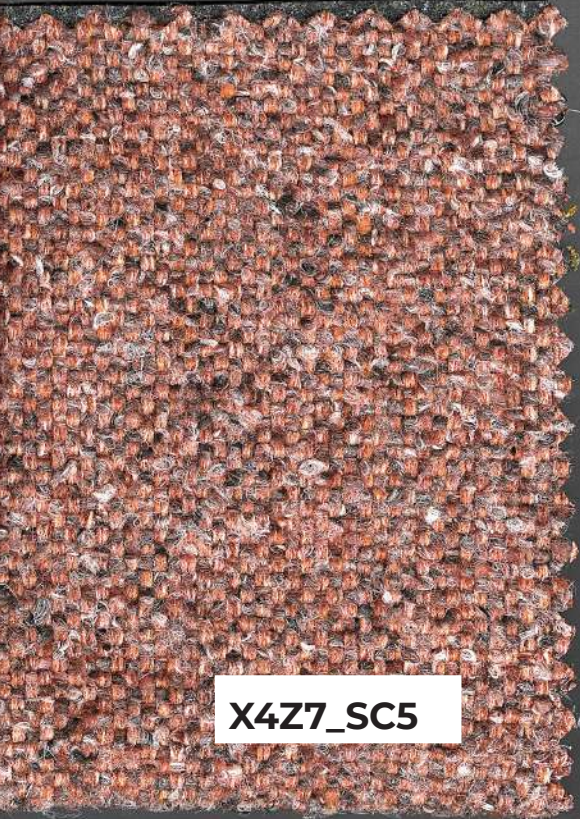

X4Z7_SC5



MO_0079_S

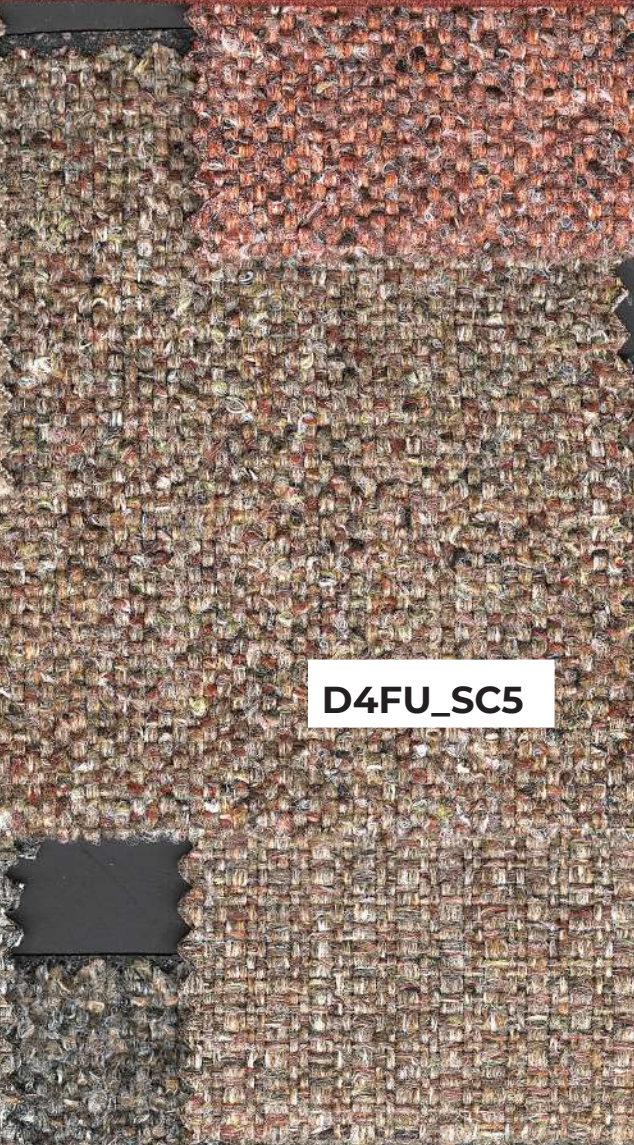


D4FU_SC5




D4FU_SC2




B346_SC2

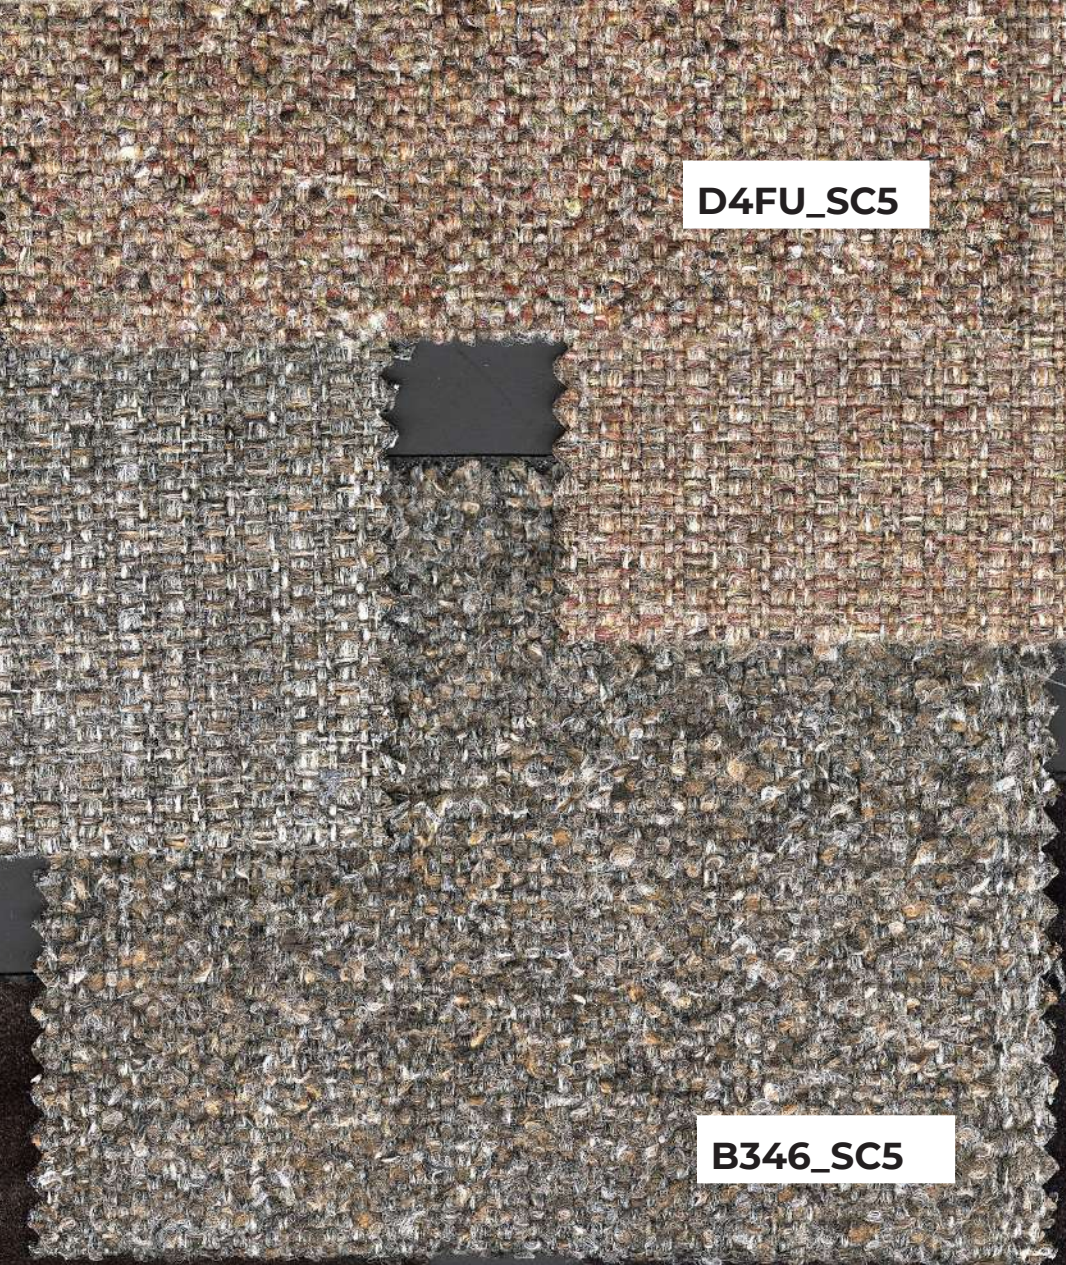

B346_SC5

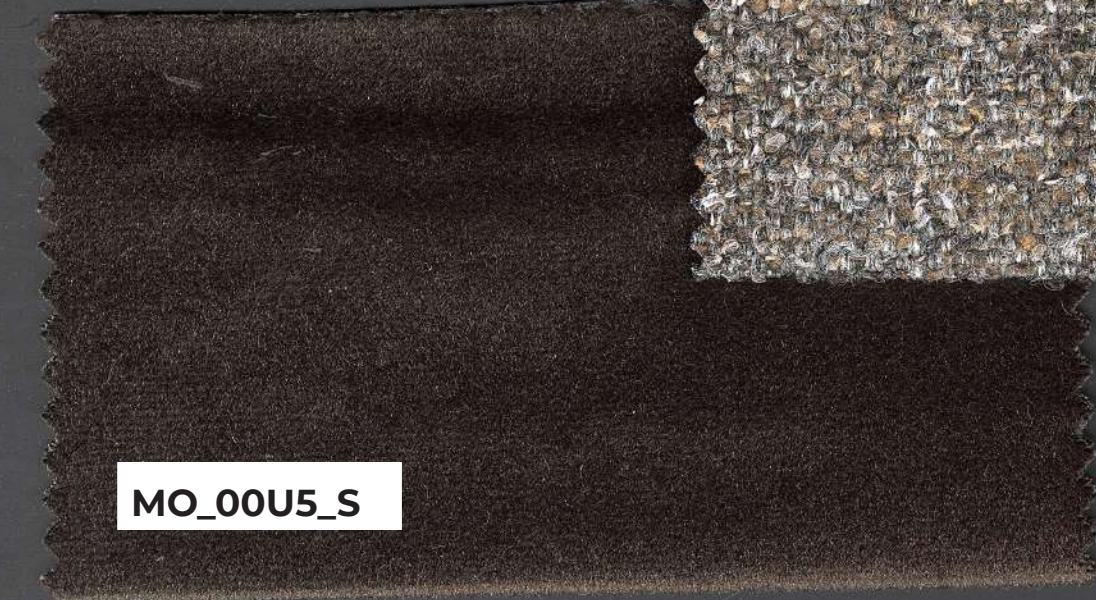

MO_00U5_S

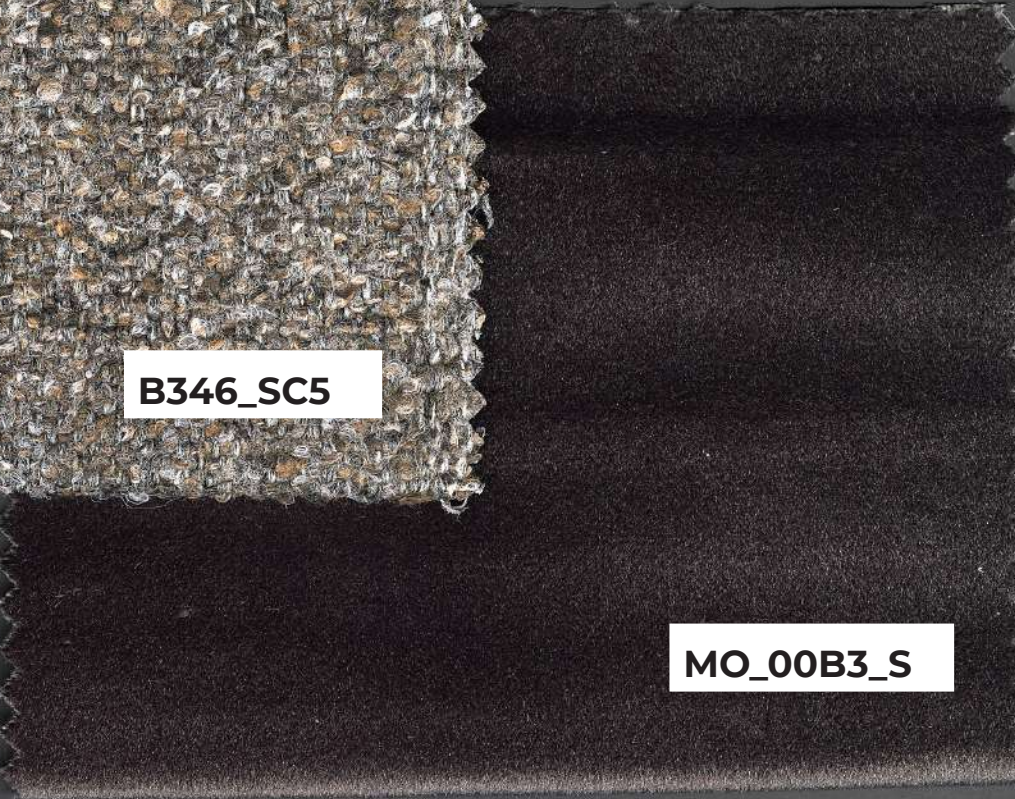

MO_00B3_S

91A6_SC2

91A6_SC5

MO_0074_S

T8B1_SC2

91Y6_SC2

MO_0003_S


T8B1_SC5

91Y6_SC5

MO_00E6_S

MO_00U5_S

Y6E3_SC2

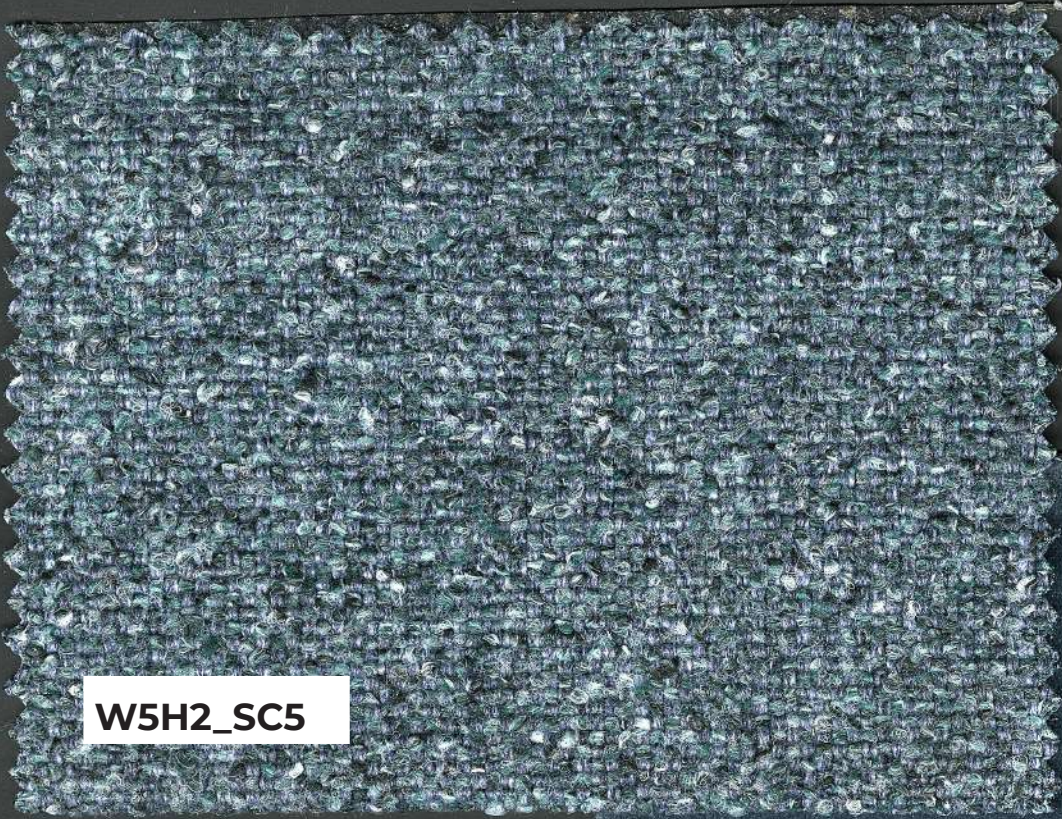


W5H2_SC5



MO_00H4_S



MO_00L8_S

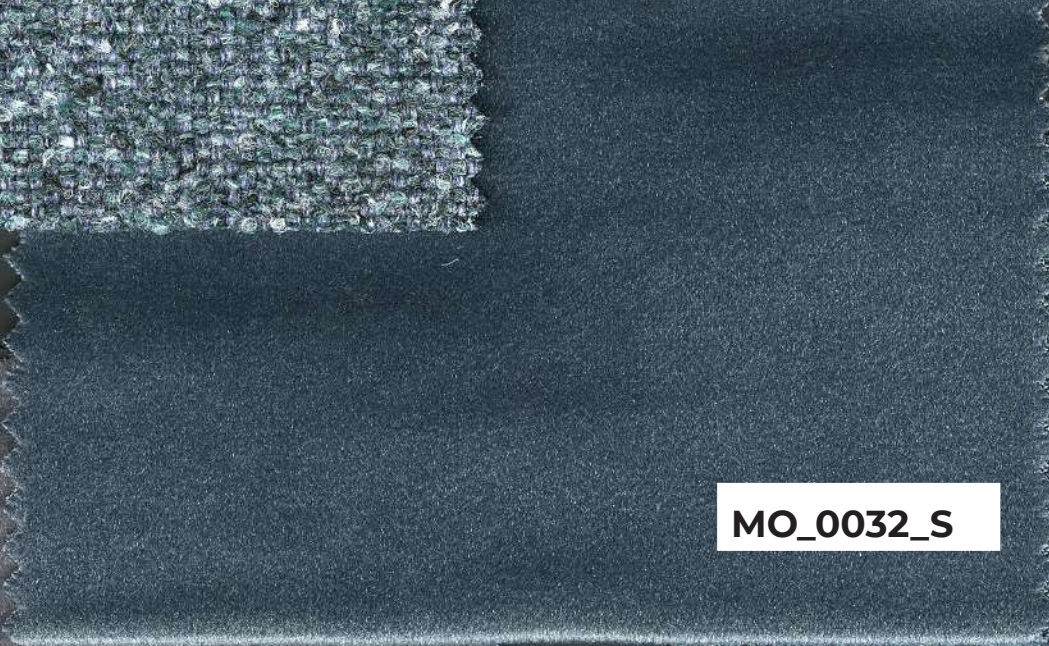


MO_0032_S



W5H2_SC2



Y6E3_SC2

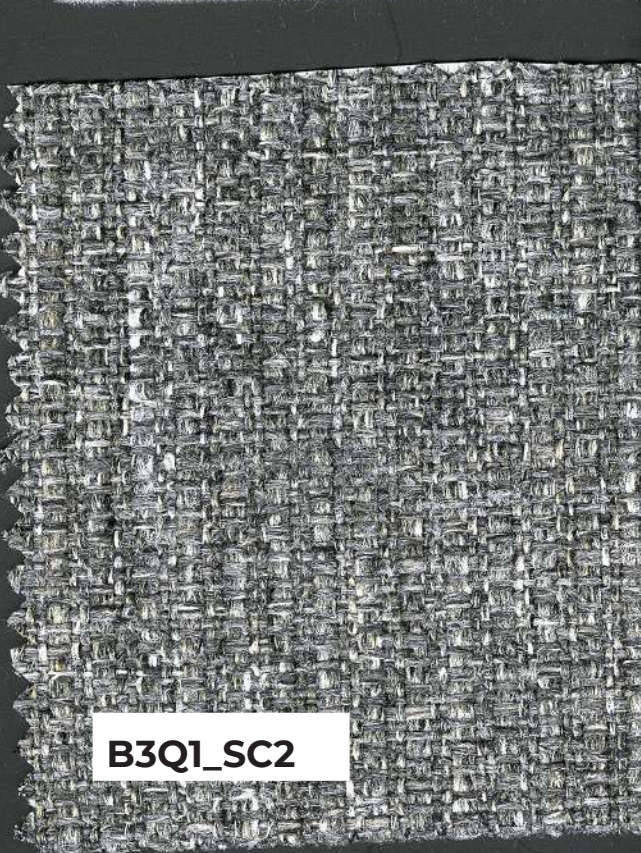

B3Q1_SC2




B3G2_SC5



MO_00G1_S



MO_00R7_S

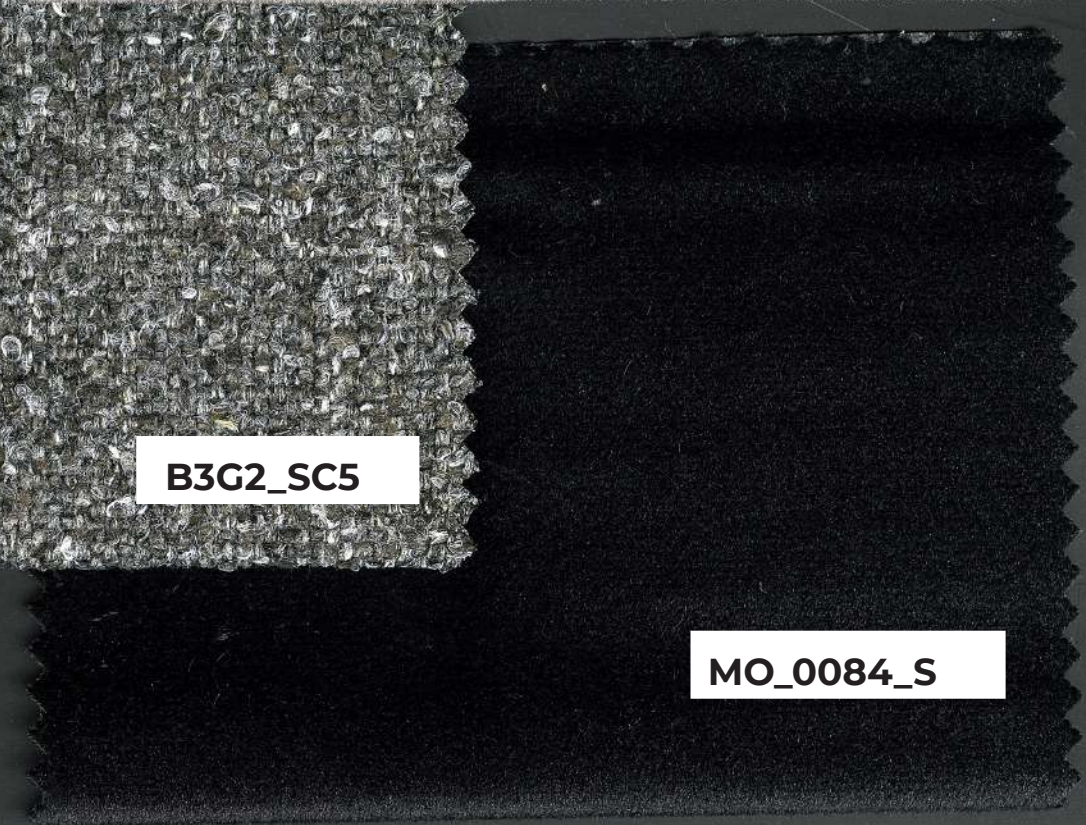

MO_0084_S

E3T8_SC5

E384_SC2

E3C9_SC5

W5R2_SC2

MO_00G1_S

W5R2_SC5

W568_SC5

MO_00M7_S

MO_00G7_S

W5M1_SC2

GENERAL FABRIC INFORMATION					
Quality Name	STANDARD-C	Design Name	CATRIN 02		
End-Use	UPHOLSTERY FABRICS	Width (±2cm)	140 cm (55")	Weight	420 gr/mt²
Composition	%100 ROLEFIN	Specials			

PHYSICAL TESTS				
Test		Standarts	Results	
Abrasion End		EN ISO 12947-2	50000	
Wyzenbeek		ASTM D4157		
Martindale-Pilling 2.000 Cycle		EN ISO 12945-2	4/5	
Brush Pilling		D3511-99A	4	
Test		Standarts	Warp	Weft
Seam Slippage		EN ISO 13936-2	2.7	3
Tear Strength		EN ISO 13937-3	306	154
Tensile Strength		EN ISO 13934-1	1148	1043
Colour Fastness Rubbing		EN ISO 105-X12(Dry/Wet)	4	3/4
Colour Fastness Light		EN ISO 105-B04		

FLAMMABILITY TESTS		
Test	Standarts	Results
Cigarette Test	BS 5852 PART 1 SOURCE 0	PASS
Match Testi	BS 5852 PART 1 SOURCE 1	PASS
Cigarette Test	EN 1021-1	PASS
Match Testi	EN 1021-2	PASS
Cigarette-Match Test	IMO PART 8	PASS
Cigarette-Match Test	BS 7176 LOW HAZARD	PASS
Cigarette Test	CALL 117	PASS
Cigarette Test	NFPA 260	PASS

REPELLENCY / CLEANABILITY TESTS		
Test	Standarts	Results
Bleach Cleanable Test	EN 20105 N 01	PASS
Bleach Cleanable Test	AATCC 101	PASS
Bleach Cleanable Test	ACT TM1.2020 PART 1	PASS

CARE CODES			
Washable	Do not wash	Care symbols	
Iron	Low iron at max 110°C		
Tumble dry	Do not tumble dry		
Bleach	Bleach can be used		
Dry clean P	Do not dry clean		

GENERAL FABRIC INFORMATION					
Quality Name	STANDARD-C	Design Name	CATRIN 05		
End-Use	UPHOLSTERY FABRICS	Width (±2cm)	140 cm (55")	Weight	480 gr/mt²
Composition	%100 ROLEFIN	Specials			

PHYSICAL TESTS				
Test		Standarts	Results	
Abrasion End		EN ISO 12947-2	75000	
Wyzenbeek		ASTM D4157		
Martindale-Pilling 2.000 Cycle		EN ISO 12945-2	4	
Brush Pilling		D3511-99A	2/3	
Test		Standarts	Warp	Weft
Seam Slippage		EN ISO 13936-2	1	1.3
Tear Strength		EN ISO 13937-3	115	105
Tensile Strength		EN ISO 13934-1	1525	797
Colour Fastness Rubbing		EN ISO 105-X12(Dry/Wet)	4/5	4/5
Colour Fastness Light		EN ISO 105-B04		

FLAMMABILITY TESTS		
Test	Standarts	Results
Cigarette Test	BS 5852 PART 1 SOURCE 0	PASS
Match Testi	BS 5852 PART 1 SOURCE 1	PASS
Cigarette Test	EN 1021-1	PASS
Match Testi	EN 1021-2	PASS
Cigarette-Match Test	IMO PART 8	PASS
Cigarette-Match Test	BS 7176 LOW HAZARD	PASS
Cigarette Test	CALL 117	PASS
Cigarette Test	NFPA 260	PASS

REPELLENCY / CLEANABILITY TESTS		
Test	Standarts	Results
Bleach Cleanable Test	EN 20105 N 01	PASS
Bleach Cleanable Test	AATCC 101	PASS
Bleach Cleanable Test	ACT TM1.2020 PART 1	PASS

CARE CODES			
Washable	Do not wash	Care symbols	
Iron	Low iron at max 110°C		
Tumble dry	Do not tumble dry		
Bleach	Bleach can be used		
Dry clean P	Do not dry clean		

GENERAL FABRIC INFORMATION					
Quality Name	STANDARD-A	Design Name	RC.MONA		
End-Use	UPHOLSTERY FABRICS	Width (±2cm)	144 cm (57")	Weight	430 gr/mt²
Composition	%59 RPET %41 PES	Specials			
PHYSICAL TESTS					
Test		Standarts		Results	
Abrasion End		EN ISO 12947-2		90000	
Wyzenbeek		ASTM D4157		200000	
Martindale-Pilling 2.000 Cycle		EN ISO 12945-2			
Brush Pilling		D3511-99A			
Test		Standarts		Warp	Weft
Seam Slippage		EN ISO 13936-2		2	2.1
Tear Strength		EN ISO 13937-3		64	47
Tensile Strength		EN ISO 13934-1		1518	940
Colour Fastness Rubbing		EN ISO 105-X12(Dry/Wet)		4/5	4/5
Colour Fastness Light		EN ISO 105-B04			
FLAMMABILITY TESTS					
Test		Standarts		Results	
Cigarette Test		BS 5852 PART 1 SOURCE 0		PASS	
Match Testi		BS 5852 PART 1 SOURCE 1 WITH TREA		PASS	
Cigarette Test		EN 1021-1		PASS	
Match Testi		EN 1021-2 WITH TREATMENT		PASS	
Cigarette-Match Test		IMO PART 8 WITH TREATMENT		PASS	
Cigarette-Match Test		BS 7176 LOW HAZARD WITH TREATME		PASS	
Cigarette Test		CALL 117		PASS	
Cigarette Test		NFPA 260		PASS	

REPELLENCY / CLEANABILITY TESTS		
Test	Standarts	Results
Bleach Cleanable Test	AATCC 101-ACT TM1 With Extra Process	PASS

CARE CODES			
Washable	Wash 30°C gentle cycle	Care symbols	
Iron	Low iron at max 110°C		
Tumble dry	Do not tumble dry		
Bleach	Do not bleach		
Dry clean P	Dry-cleaning in perchloroethylene gentle cycle		



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100



Our products fulfil the requirements of Annex XVII of REACH (incl. the use of azo-dyes, heavy metals, etc.) as well as the American requirement regarding total content of lead in children's articles)
In stain repellent products, we always use human and environmental friendly C6 fluorocarbons. In FR treatment, we always use DecaBDE free FR compounds.
The colours in production might slightly vary from this reference due to different lots in production.