



**FORRES - PLATIN 01
PEARL**



PE_00M4_P



FO_00BT_SP



PL_M7M7_SP



PL_M2E1_SP




PE_0069_P



FO_00AA_SP



PL_FZ44_SP

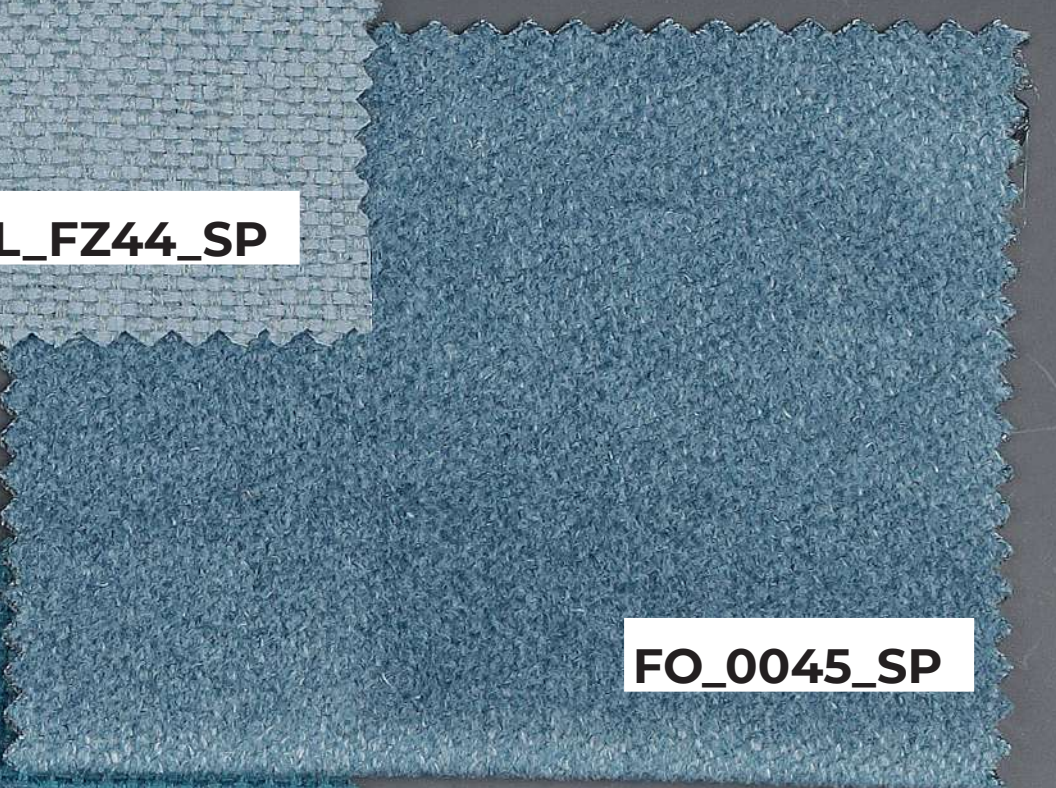


FO_0045_SP




FO_0048_SP



PL_Y5Y5_SP

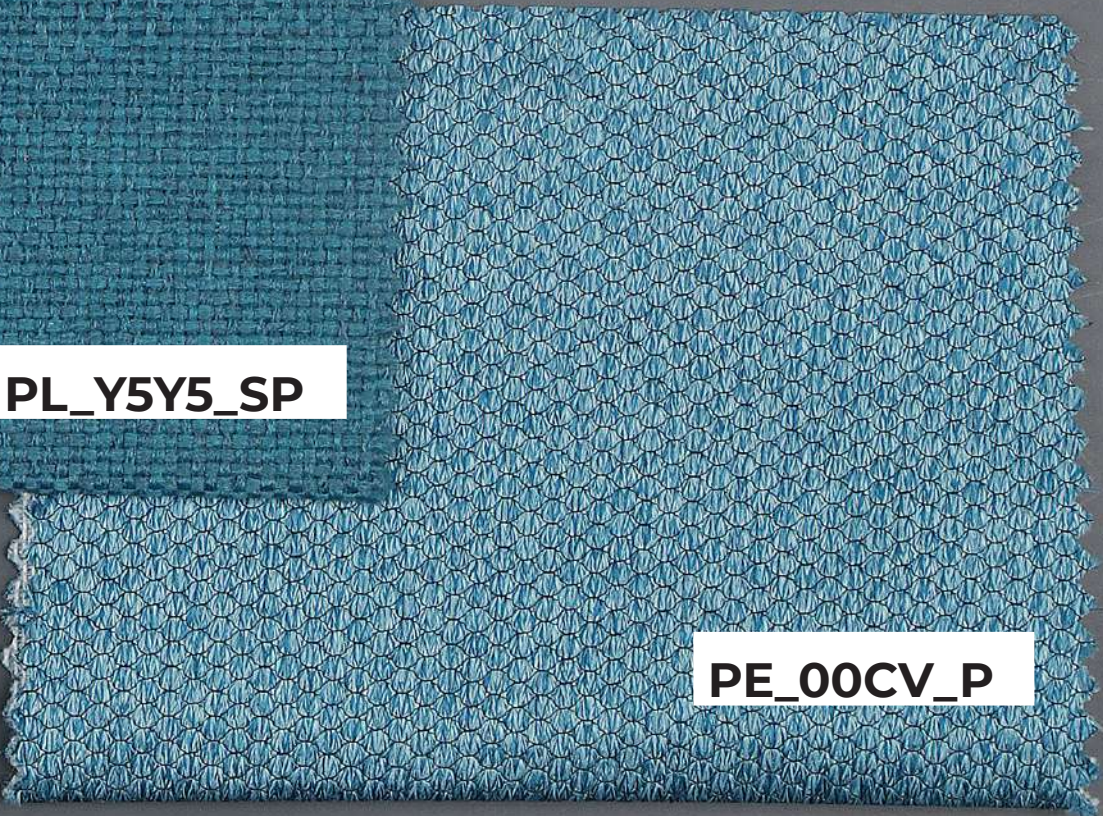

PE_00CV_P

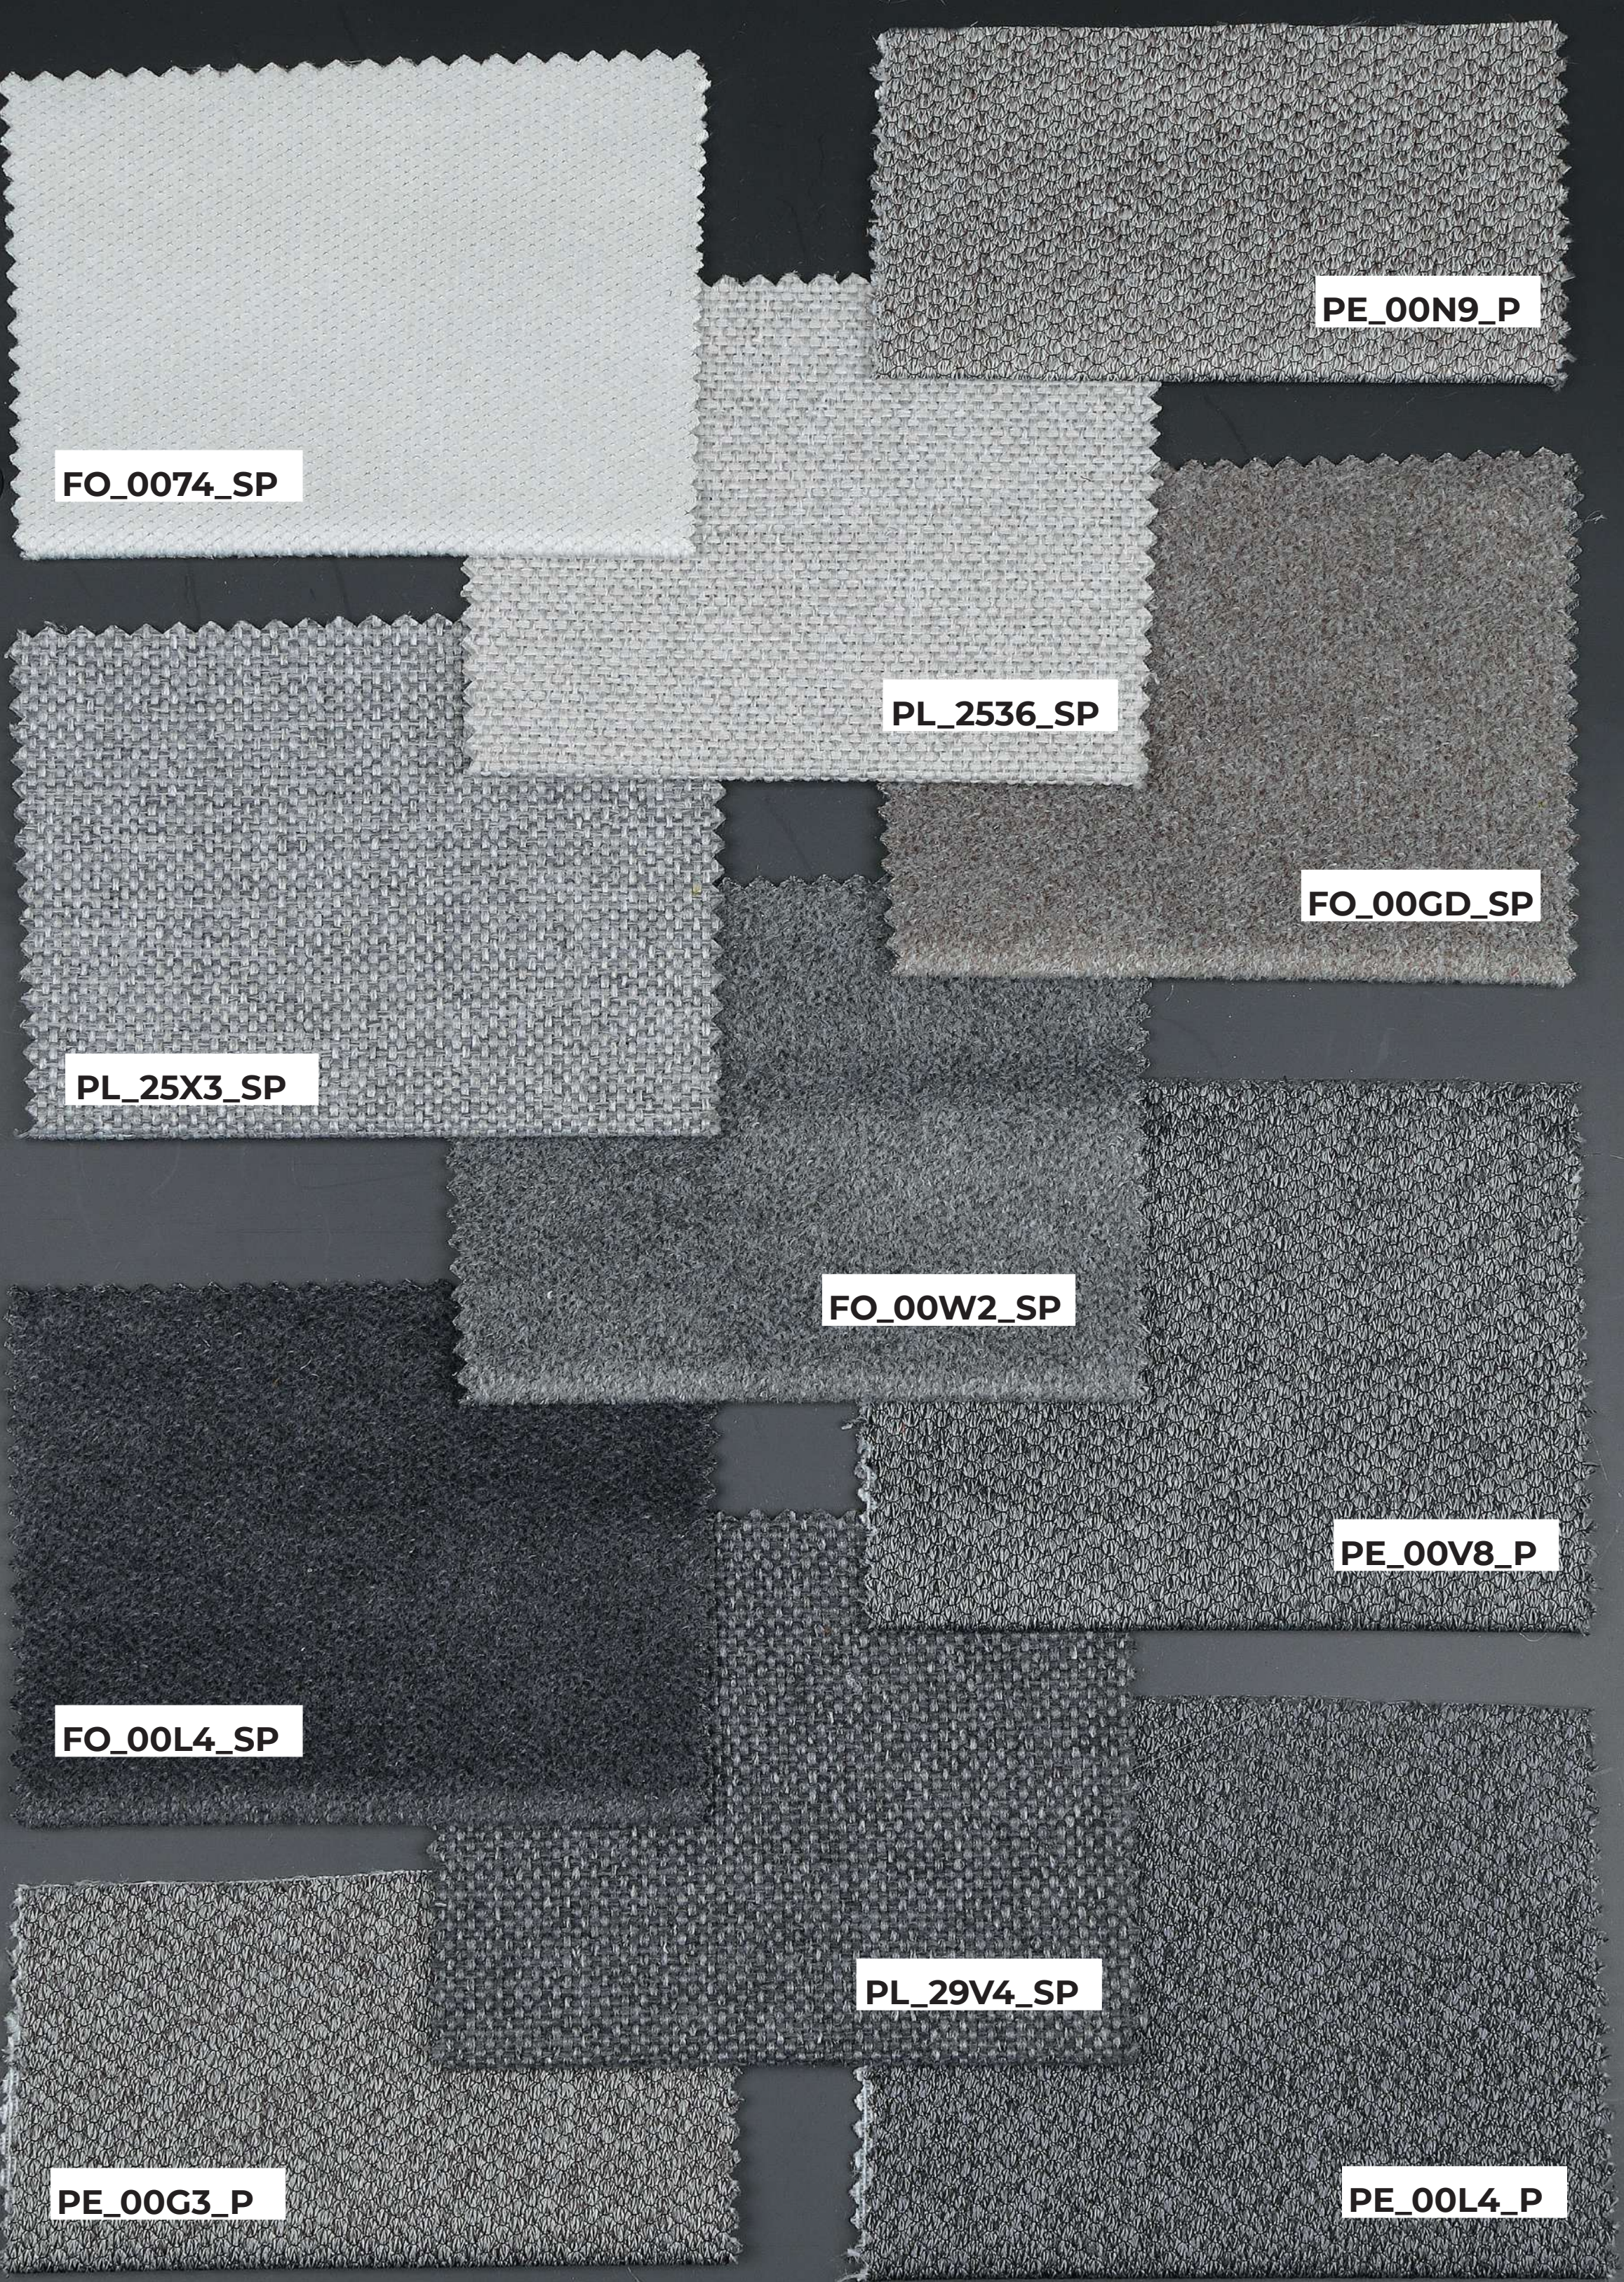

FO_0074_SP

PE_00N9_P

PL_2536_SP

FO_00GD_SP

PL_25X3_SP

FO_00W2_SP

PE_00V8_P

FO_00L4_SP

PL_29V4_SP

PE_00G3_P

PE_00L4_P



PE_0095_P



PL_T5D8_SP




PL_J2S1_SP



FO_0095_SP



PL_BNZ8_SP

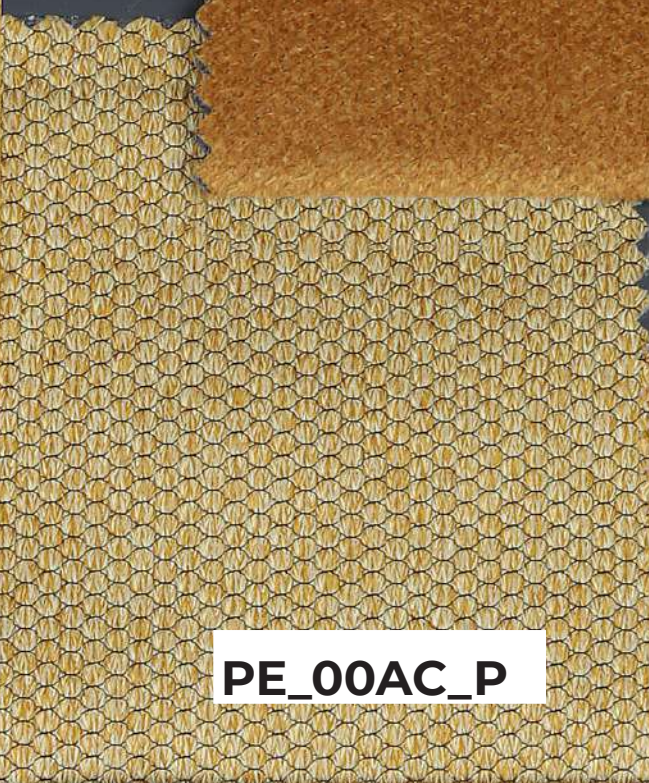

PE_00AC_P



PE_00J2_P



PE_00CF_P



FO_00CF_SP



PE_00X7_P



PE_0050_P



FO_0020_SP



FO_00D7_SP



PE_0037_P




FO_00FP_SP



PE_00B6_P



PL_FSFS_SP

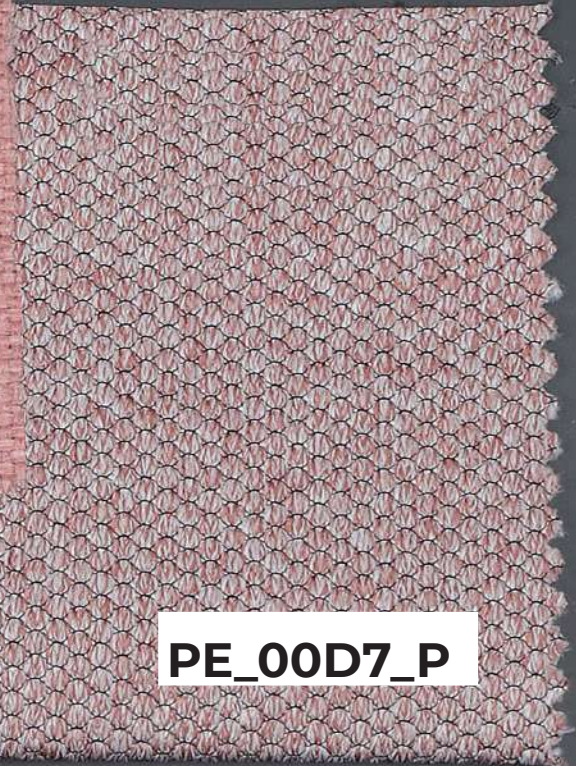

PE_00D7_P



FO_0008_SP



PE_0008_P




PL_K9K9_SP



PL_13K2_SP



FO_00N9_SP

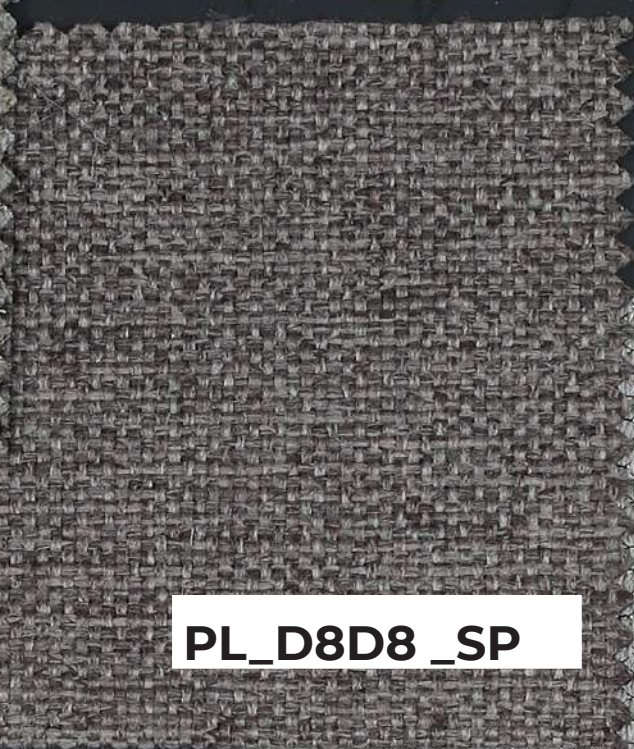

PL_D8D8_SP



PE_0019_P




PE_00N8_P



PE_D8E4_P



FO_00N4_SP

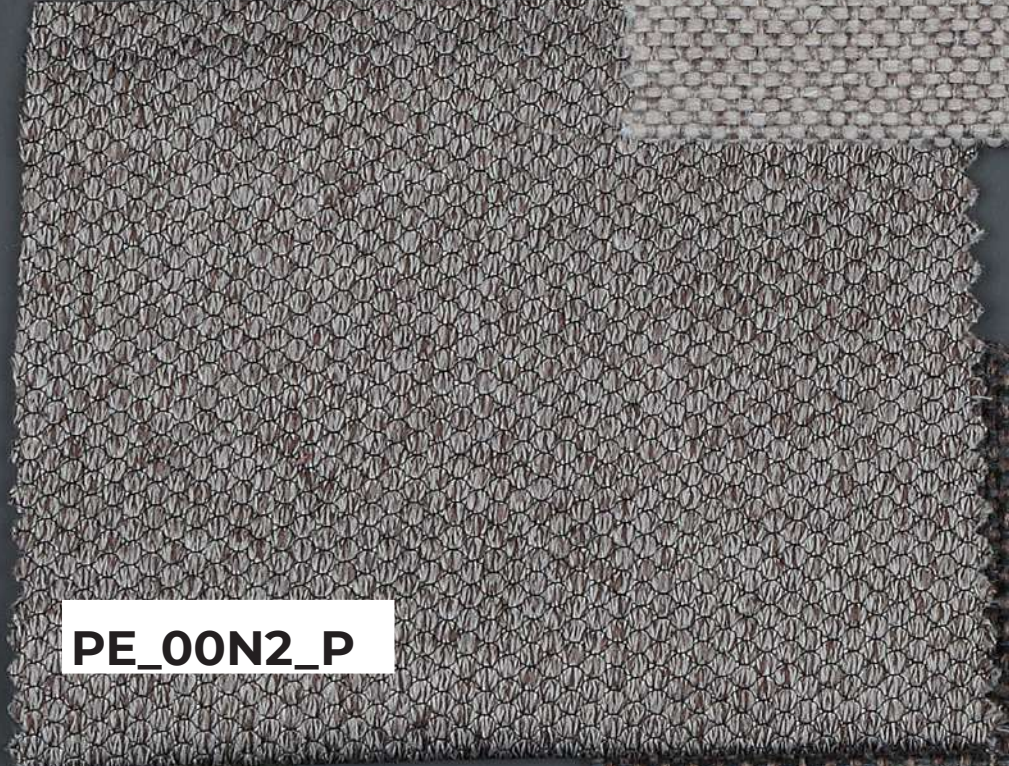

PE_00N2_P



PL_N184_SP



PE_00Q6_P



PL_J5B2_SP

FO_00T7_SP

PE_00S6_P

PE_00T7_P

FO_0013_SP

FO_0015_SP

PE_00P7_P

PL_T584_SP

PL_U1B7_SP

PE_00V6_P


PE_00B7_P



PE_00J3_P




PE_0003_P

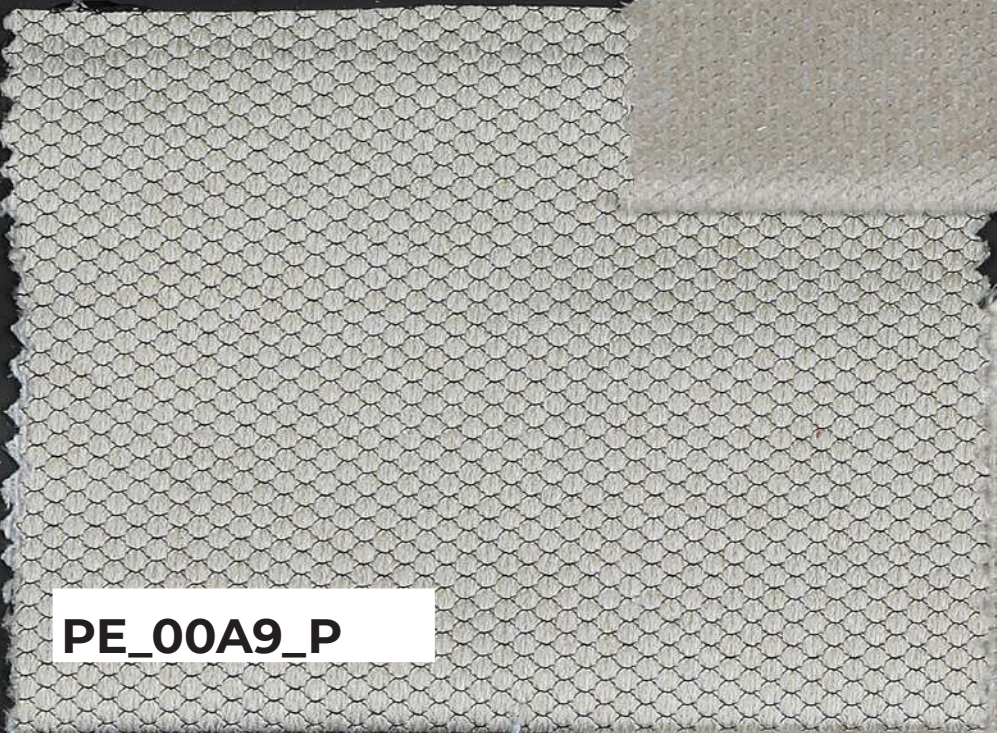

PE_00A9_P



FO_00A2_SP

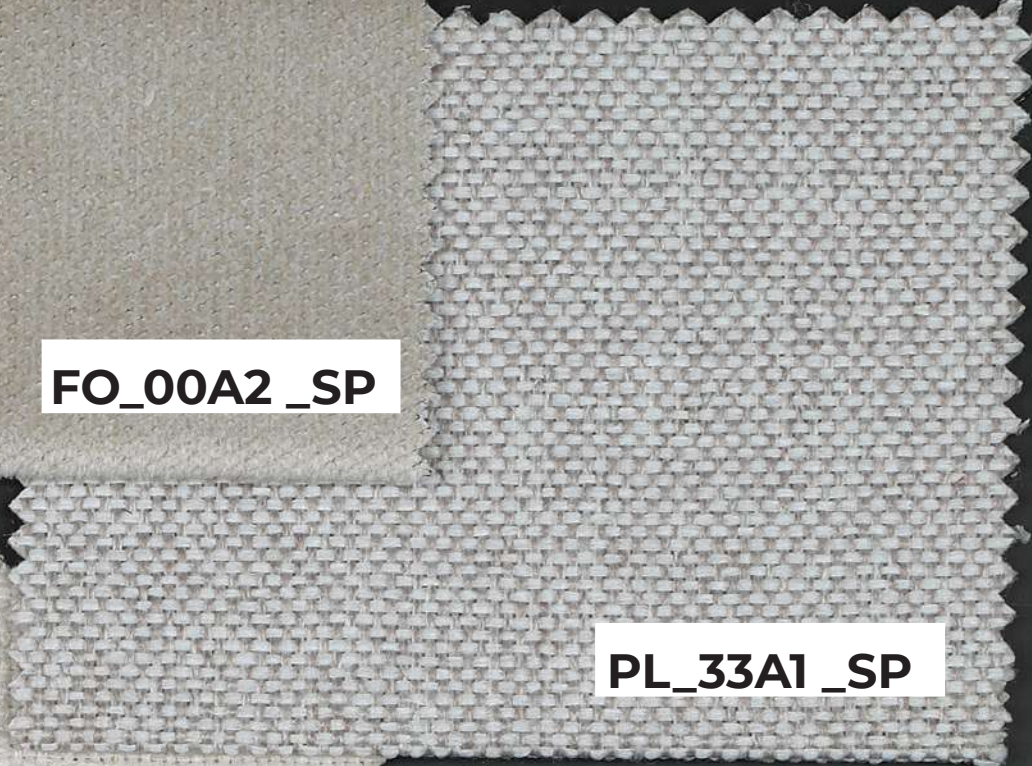

PL_33A1_SP



PL_53A3_SP



FO_00N2_SP



PE_0074_P



PE_0073_P



PL_J5N1_SP



FO_00Q6_SP

GENERAL FABRIC INFORMATION					
Quality Name	STANDARD PLUS-B	Design Name	PLATIN 01		
End-Use	UPHOLSTERY FABRICS	Width (±2cm)	140 cm (55")	Weight	460 gr/mt²
Composition	%100 PES	Specials			

PHYSICAL TESTS			
Test	Standarts	Results	
Abrasion End	EN ISO 12947-2	100000	
Wyzenbeek	ASTM D4157		
Martindale-Pilling 2.000 Cycle	EN ISO 12945-2	4	
Brush Pilling	D3511-99A	3/4	
Test	Standarts	Warp	Weft
Seam Slippage	EN ISO 13936-2	4.5	3.7
Tear Strength	EN ISO 13937-3	125	143
Tensile Strength	EN ISO 13934-1	1199	1394
Colour Fastness Rubbing	EN ISO 105-X12(Dry/Wet)	4/5	4/5
Colour Fastness Light	EN ISO 105-B04		

FLAMMABILITY TESTS		
Test	Standarts	Results
Cigarette Test	BS 5852 PART 1 SOURCE 0	PASS
Match Testi	BS 5852 PART 1 SOURCE 1	PASS
Crib 5	BS 5852 PART 2 SOURCE 5	PASS
Cigarette Test	EN 1021-1	PASS
Match Testi	EN 1021-2	PASS
Cigarette-Match Test	IMO PART 8	PASS
Cigarette-Match Test	BS 7176 LOW HAZARD	PASS
Cigarette-Match Crib 5 Test	BS 7176 MEDIUM HAZARD	PASS
Cigarette Test	CALL 117	PASS
Cigarette Test	NFPA 260	PASS

REPELLENCY / CLEANABILITY TESTS		
Test	Standarts	Results
Bleach Cleanable Test	AATCC 101-ACT TM1 With Extra Process	PASS

CARE CODES			
Washable	Do not wash	Care symbols	
Iron	Low iron at max 110°C		
Tumble dry	Do not tumble dry		
Bleach	Do not bleach		
Dry clean P	Dry-cleaning in perchloroethylene gentle cycle		

GENERAL FABRIC INFORMATION					
Quality Name	STANDARD PLUS-A	Design Name	FORRES		
End-Use	UPHOLSTERY FABRICS	Width (±2cm)	140 cm (55")	Weight	460 gr/mt²
Composition	%100 PES	Specials			

PHYSICAL TESTS			
Test	Standarts	Results	
Abrasion End	EN ISO 12947-2	50000	
Wyzenbeek	ASTM D4157		
Martindale-Pilling 2.000 Cycle	EN ISO 12945-2	4/5	
Brush Pilling	D3511-99A		
Test	Standarts	Warp	Weft
Seam Slippage	EN ISO 13936-2	2.7	2.8
Tear Strength	EN ISO 13937-3	55	45
Tensile Strength	EN ISO 13934-1	700	430
Colour Fastness Rubbing	EN ISO 105-X12(Dry/Wet)	4/5	4/5
Colour Fastness Light	EN ISO 105-B04		

FLAMMABILITY TESTS		
Test	Standarts	Results
Cigarette Test	BS 5852 PART 1 SOURCE 0	PASS
Match Testi	BS 5852 PART 1 SOURCE 1	PASS
Crib 5	BS 5852 PART 2 SOURCE 5	PASS
Cigarette Test	EN 1021-1	PASS
Match Testi	EN 1021-2	PASS
Cigarette-Match Test	IMO PART 8	PASS
Cigarette-Match Test	BS 7176 LOW HAZARD	PASS
Cigarette-Match Crib 5 Test	BS 7176 MEDIUM HAZARD	PASS
Cigarette Test	CALL 117	PASS
Cigarette Test	NFPA 260	PASS

REPELLENCY / CLEANABILITY TESTS		
Test	Standarts	Results
Bleach Cleanable Test	AATCC 101-ACT TM1 With Extra Process	PASS

CARE CODES			
Washable	Do not wash	Care symbols	
Iron	Low iron at max 110°C		
Tumble dry	Do not tumble dry		
Bleach	Do not bleach		
Dry clean P	Dry-cleaning in perchloroethylene gentle cycle		

GENERAL FABRIC INFORMATION					
Quality Name	PREMIUM-A	Design Name	PEARL		
End-Use	UPHOLSTERY FABRICS	Width (±2cm)	140 cm (55")	Weight	475 gr/mt²
Composition	%100 PES	Specials			

PHYSICAL TESTS				
Test		Standarts	Results	
Abrasion End		EN ISO 12947-2	50000	
Wyzenbeek		ASTM D4157		
Martindale-Pilling 2.000 Cycle		EN ISO 12945-2	4/5	
Brush Pilling		D3511-99A		
Test		Standarts	Warp	Weft
Seam Slippage		EN ISO 13936-2	2	2
Tear Strength		EN ISO 13937-3	70	170
Tensile Strength		EN ISO 13934-1	620	1100
Colour Fastness Rubbing		EN ISO 105-X12(Dry/Wet)	4/5	4/5
Colour Fastness Light		EN ISO 105-B04		

FLAMMABILITY TESTS		
Test	Standarts	Results
Cigarette Test	BS 5852 PART 1 SOURCE 0	PASS
Match Testi	BS 5852 PART 1 SOURCE 1	PASS
Crib 5	BS 5852 PART 2 SOURCE 5	PASS
Cigarette Test	EN 1021-1	PASS
Match Testi	EN 1021-2	PASS
Cigarette-Match Test	IMO PART 8	PASS
Cigarette-Match Test	BS 7176 LOW HAZARD	PASS
Cigarette-Match Crib 5 Test	BS 7176 MEDIUM HAZARD	PASS
Cigarette Test	CALL 117	PASS
Cigarette Test	NFPA 260	PASS

REPELLENCY / CLEANABILITY TESTS		
Test	Standarts	Results
Bleach Cleanable Test	AATCC 101-ACT TM1 With Extra Process	PASS

CARE CODES			
Washable	Wash 30°C gentle cycle	Care symbols	
Iron	Low iron at max 110°C		
Tumble dry	Do not tumble dry		
Bleach	Do not bleach		
Dry clean P	Dry-cleaning in perchloroethylene gentle cycle		



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100



Our products fulfil the requirements of Annex XVII of REACH (incl. the use of azo-dyes, heavy metals, etc.) as well as the American requirement regarding total content of lead in children's articles)
In stain repellent products, we always use human and environmental friendly C6 fluorocarbons. In FR treatment, we always use DecaBDE free FR compounds.
The colours in production might slightly vary from this reference due to different lots in production.