



BT.MEDA

Polyester Flatweave (Knitted)

createplus.com



designed by technology

OUR STORY

KREATE+ IS A TEXTILE-
DESIGN AND TECHNOLOGY
COMPANY THAT
IS PASSIONATELY
FOCUSED ON CREATING
CUSTOMISED, HIGH
QUALITY AND INNOVATIVE
TEXTILE SOLUTIONS FOR
A SUSTAINABLE FUTURE
THAT ADD EXCEPTIONAL
VALUE TO YOUR BUSINESS



MEDA_00D9



MEDA_0015




MEDA_0059



MEDA_S062



MEDA_S088

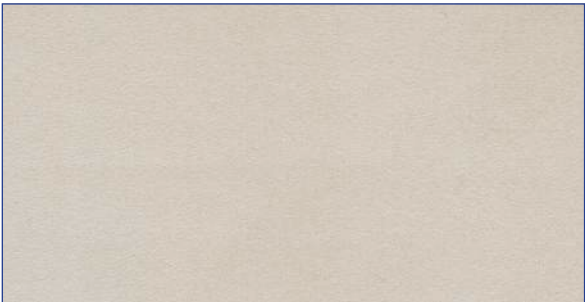

MEDA_00A1



MEDA_00A2




MEDA_00A6




MEDA_00AC



MEDA_00AP

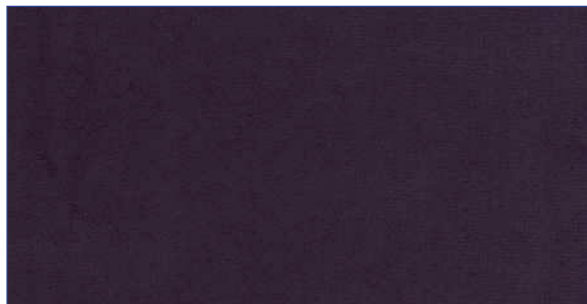

MEDA_00B7

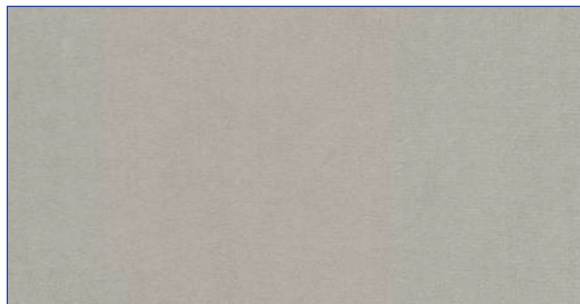

MEDA_00BA



MEDA_00BM




MEDA_00CA




MEDA_00D7




MEDA_00E1

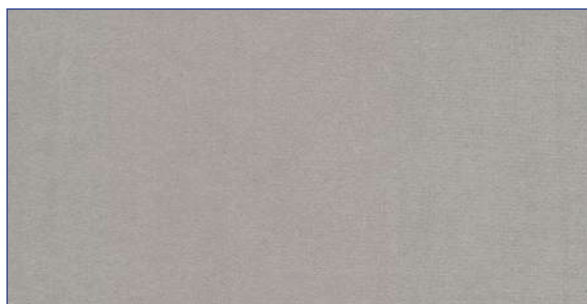


MEDA_00E6

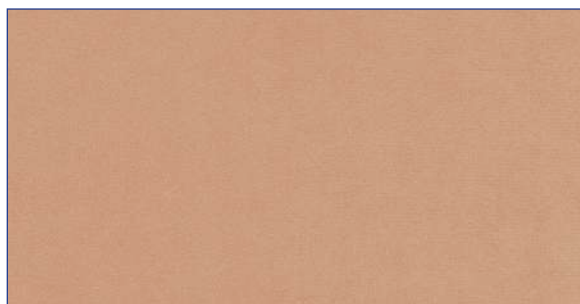


MEDA_00EA

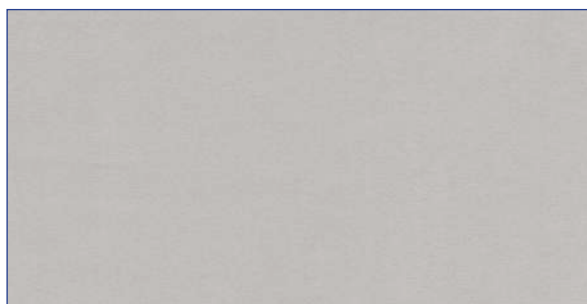


MEDA_00EV

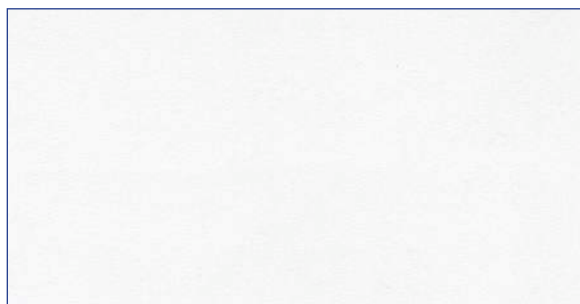

MEDA_00F9

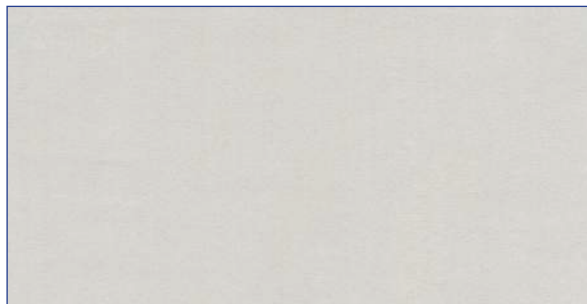

MEDA_00FR

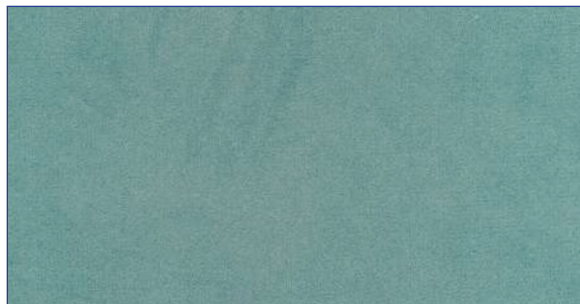

MEDA_00H4



MEDA_00H6




MEDA_00H8




MEDA_00H9



MEDA_00K6

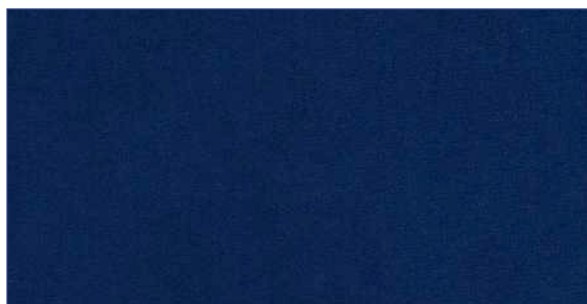


MEDA_00L2

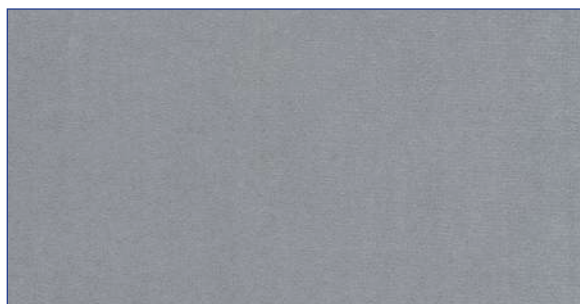

MEDA_00L8



MEDA_00M1

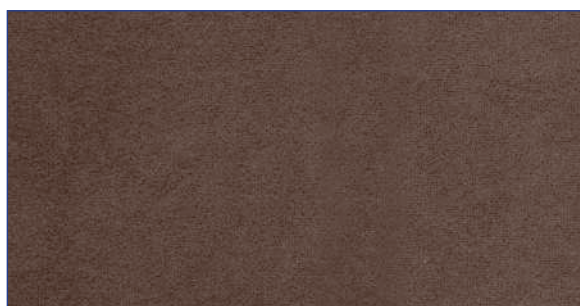

MEDA_00N5



MEDA_00N7



MEDA_00N9




MEDA_00P1




MEDA_00R2




MEDA_00R7

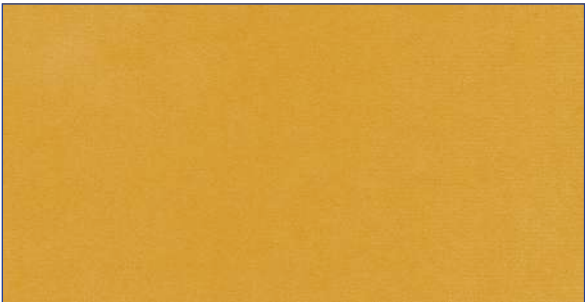

MEDA_00S3

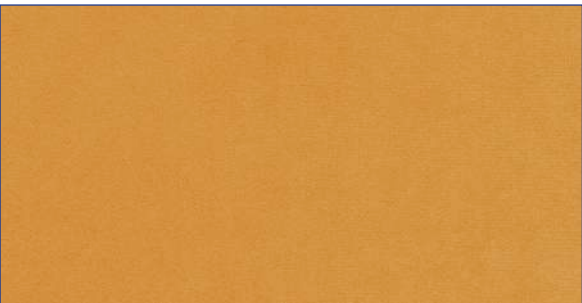

MEDA_00S7

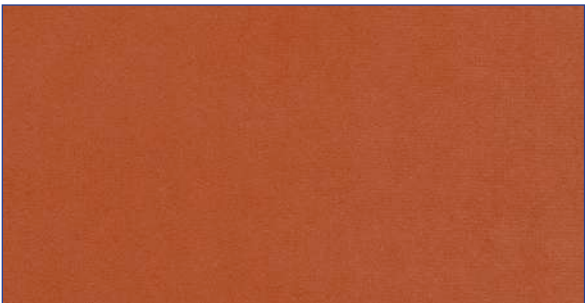

MEDA_00T1



MEDA_00T8



MEDA_00U3



MEDA_00U4



MEDA_00U5




MEDA_00U9



MEDA_00V1



MEDA_00V5

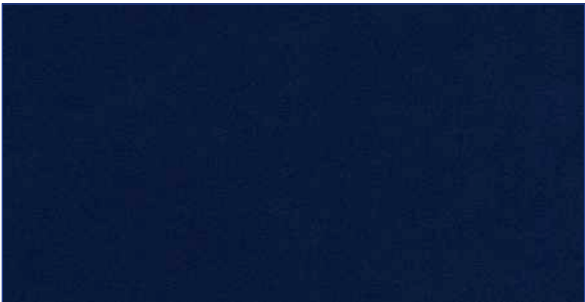

MEDA_00W6




MEDA_00Y5



MEDA_00Y8



MEDA_00Z2

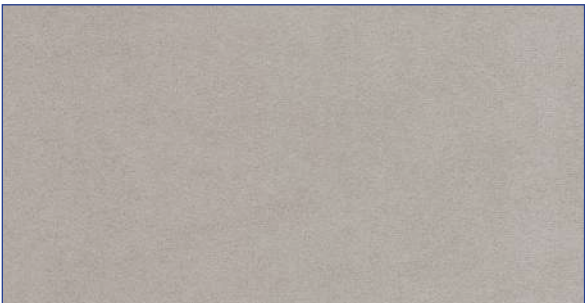

MEDA_00Z4



MEDA_0001



MEDA_0003



MEDA_0007




MEDA_0016




MEDA_0020




MEDA_0021

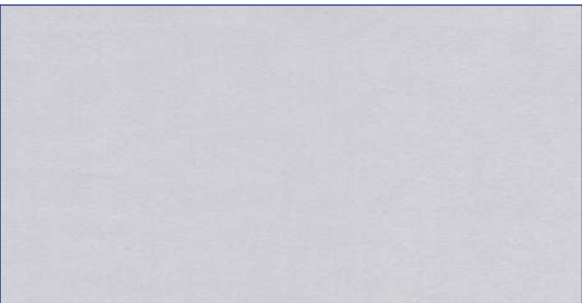


MEDA_0025

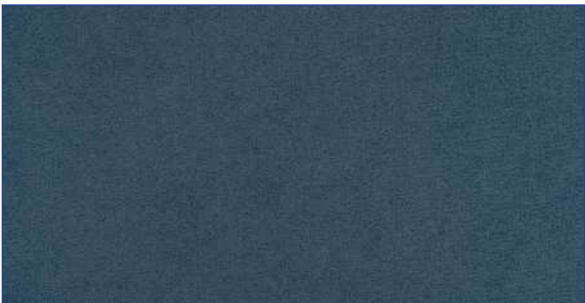

MEDA_0032

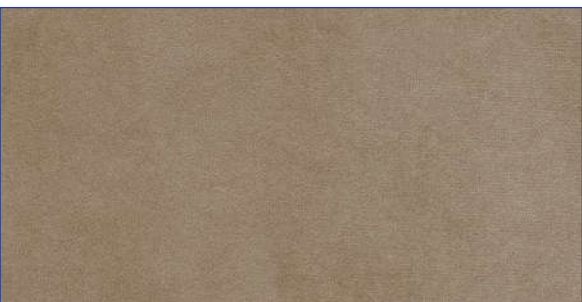

MEDA_0037

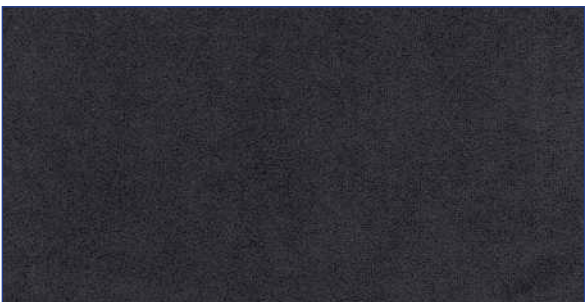

MEDA_0038



MEDA_0048



MEDA_0050




MEDA_0053



MEDA_0055




MEDA_0058

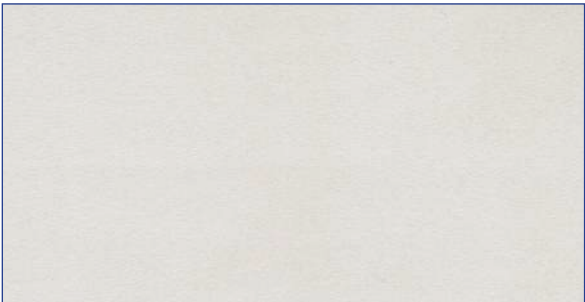

MEDA_0065




MEDA_0073

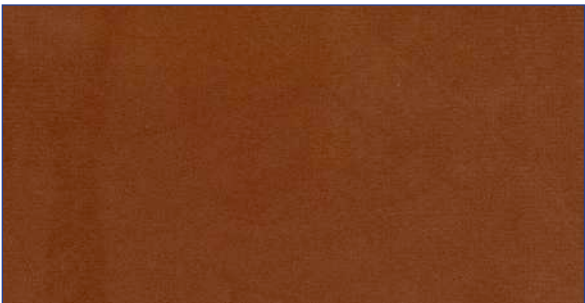

MEDA_0076




MEDA_0078

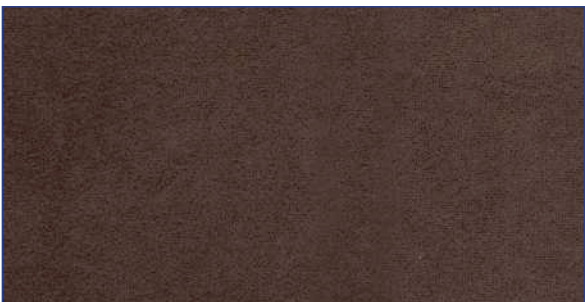

MEDA_0080



MEDA_0094

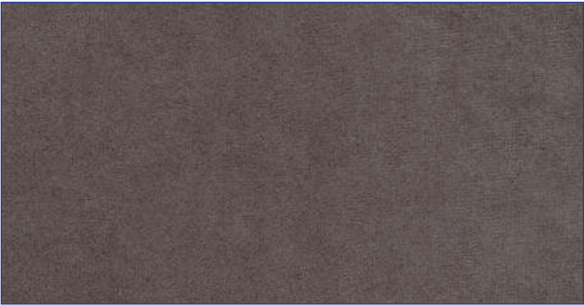

MEDA_S0G2

GENERAL FABRIC INFORMATION					
Quality Name	BT.MEDA-BYM	Design Name	BT.MEDA		
End-Use	UPHOLSTERY FABRICS	Width (±2cm)	140 cm (55")	Weight	337 gr/mt ²
Composition	%100 PES	Specials			

PHYSICAL TESTS				
Test	Standarts		Results	
Abrasion End	EN ISO 12947-2		60000	
Wyzenbeek	ASTM D4157			
Martindale-Pilling 2.000 Cycle	EN ISO 12945-2			
Brush Pilling	D3511-99A			
Test	Standarts		Warp	Weft
Seam Slippage	EN ISO 13936-2		2.3	2.5
Tear Strength	EN ISO 13937-3			
Tensile Strength	EN ISO 13934-1		455	694
Colour Fastness Rubbing	EN ISO 105-X12(Dry/Wet)		4/5	4/5

FLAMMABILITY TESTS		
Test	Standarts	Results
Annex 6 Horizontal Burning	ECE R.118 03	PASS
Annex 7 Melting	ECE R.118 03	PASS
Annex 8 Vertical Burning	ECE R.118 03	PASS

REPELLENCY / CLEANABILITY TESTS		
Test	Standarts	Results

CARE CODES			
Washable	Wash 30°C gentle cycle	Care symbols	
Iron	Low iron at max 110°C		
Tumble dry	Do not tumble dry		
Bleach	Do not bleach		
Dry clean P	Dry-cleaning in perchloroethylene gentle cycle		

