BS.NOUVO.RCA

Polyester Flatweave

kreateplus.com

KREATE+


designed by technology

OUR STORY

KREATE+ IS A TEXTILE-DESIGN AND TECHNOLOGY COMPANY THAT IS PASSIONATELY FOCUSED ON CREATING CUSTOMISED, HIGH QUALITY AND INNOVATIVE TEXTILE SOLUTIONS FOR A SUSTAINABLE FUTURE THAT ADD EXCEPTIONAL VALUE TO YOUR BUSINESS

/kreateplus


BS.NOUVO.RCA

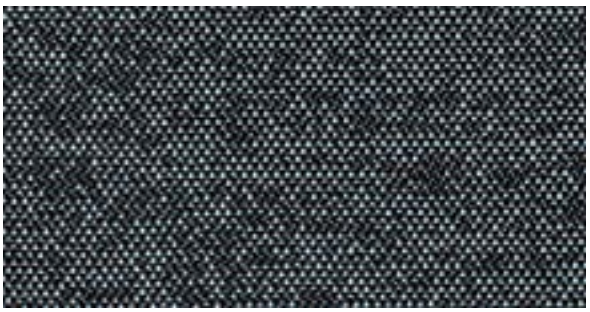

RC.BS.NOUVO 40_24M1



RC.BS.NOUVO 40_2425

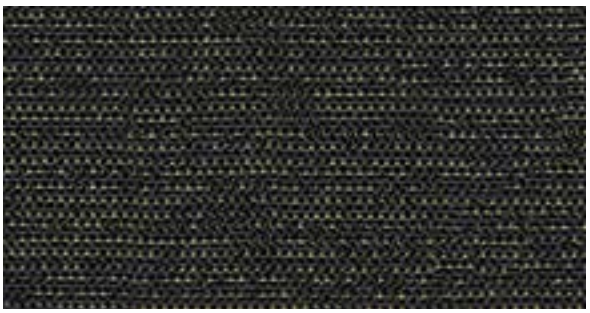

RC.BS.NOUVO 40_2484-1



RC.BS.NOUVO 41_2425-1



RC.BS.NOUVO 41_2425



RC.BS.NOUVO 41_2441




RC.BS.NOUVO 42_24K2



RC.BS.NOUVO 42_2425




RC.BS.NOUVO 42_2441

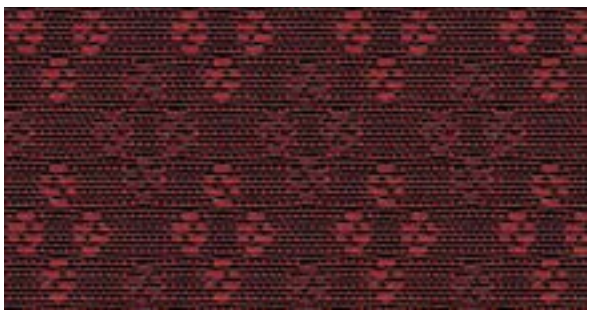


RC.BS.NOUVO 43_24K2

All our designs are registered and protected against unauthorized copying.


BS.NOUVO.RCA

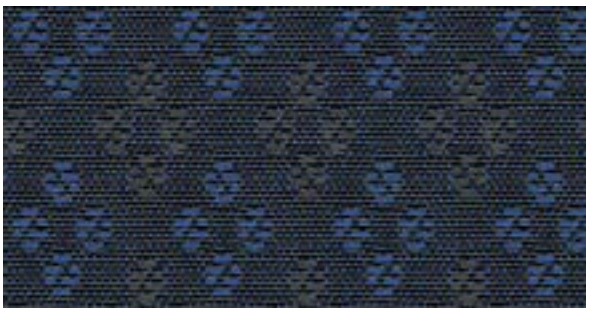


RC.BS.NOUVO 43_2431-1

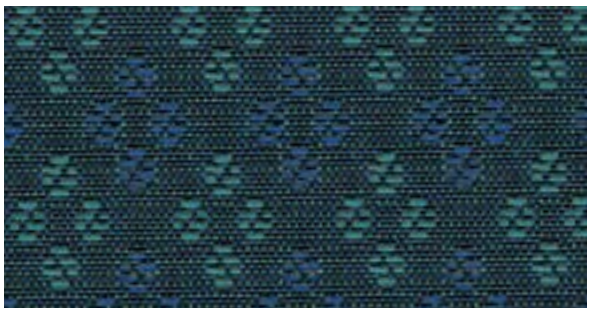

RC.BS.NOUVO 43_2431

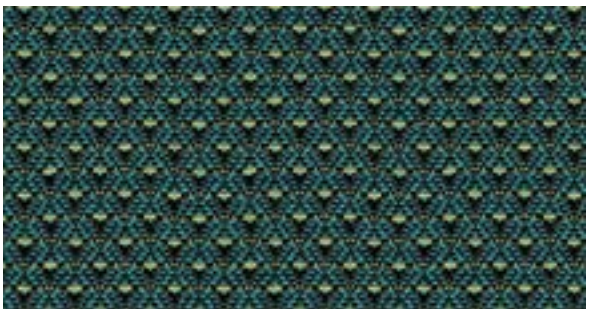

RC.BS.NOUVO 44_24H7

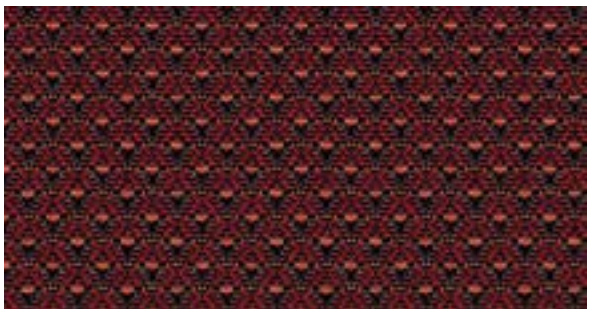

RC.BS.NOUVO 44_2428



RC.BS.NOUVO 45_24H7




RC.BS.NOUVO 45_24K2



RC.BS.NOUVO 45_2411



RC.BS.NOUVO 45_2431

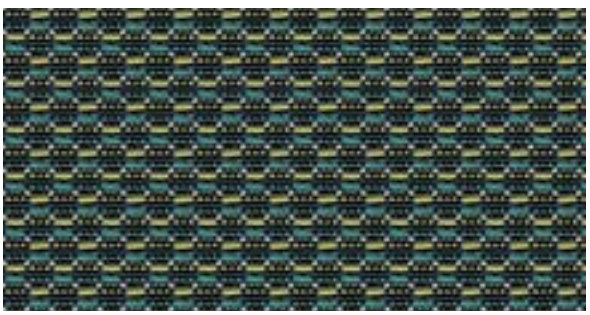


RC.BS.NOUVO 46_2414H7




RC.BS.NOUVO 46_248428

All our designs are registered and protected against unauthorized copying.


BS.NOUVO.RCA

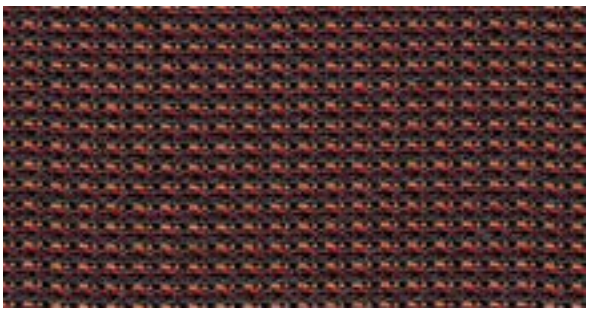

RC.BS.NOUVO 47_2459K2

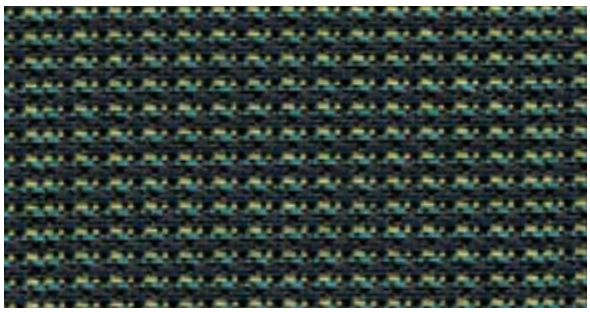

RC.BS.NOUVO 47_2484P9

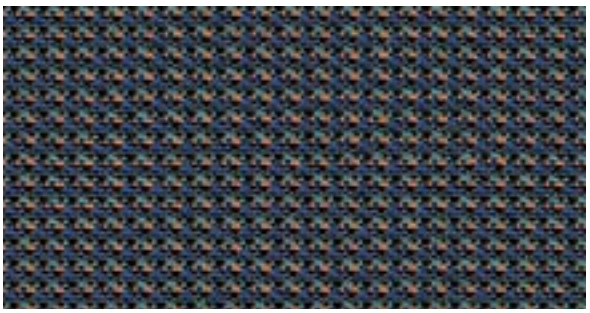


RC.BS.NOUVO 47_243128



RC.BS.NOUVO 48_24H9H7




RC.BS.NOUVO 48_2459K2

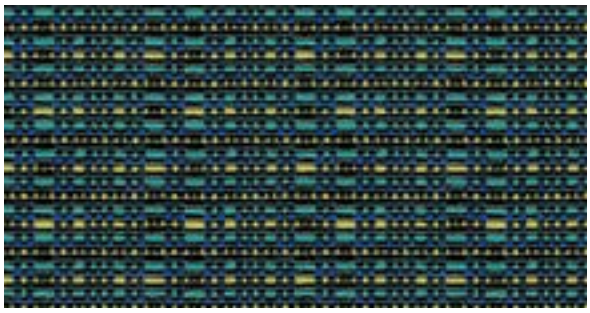

RC.BS.NOUVO 49_24H914



RC.BS.NOUVO 49_242814

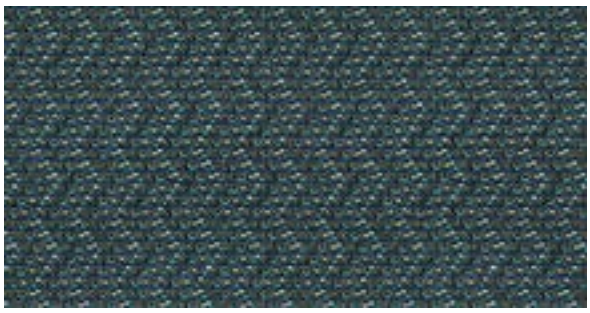

RC.BS.NOUVO 50_24H9H7



RC.BS.NOUVO 50_248428

All our designs are registered and protected against unauthorized copying.

GENERAL FABRIC INFORMATION					
Quality Name	BS.NOUVO-RCA	Design Name	RC.BS.NOUVO 50		
End-Use	BUS & COACH FABRICS	Width (±2cm)	140 cm (55")	Weight	472 gr/mt²
Composition	%54 RPET %46 PES	Specials			

PHYSICAL TESTS			
Test	**Standarts**	**Results**	
Abrasion End	EN ISO 12947-2	> 50000	
Wyzenbeek	ASTM D4157		
Martindale-Pilling 2.000 Cycle	EN ISO 12945-2	5	
Brush Pilling	D3511-99A		
Test	**Standarts**	**Warp**	**Weft**
Seam Slippage	EN ISO 13936-2	1.5	2
Tear Strength	EN ISO 13937-3	0	0
Tensile Strength	EN ISO 13934-1	2297	1489
Colour Fastness Rubbing	EN ISO 105-X12(Dry/Wet)	4/5	4/5

FLAMMABILITY TESTS		
Test	**Standarts**	**Results**
Cigarette Test	BS 5852 PART 1 SOURCE 0	PASS
Annex 6 Horizontal Burning	ECE R.118 03	PASS
Annex 7 Melting	ECE R.118 03	PASS
Annex 8 Vertical Burning	ECE R.118 03	PASS

REPELLENCY / CLEANABILITY TESTS		
Test	**Standarts**	**Results**

CARE CODES			
Washable	Wash 30°C gentle cycle	Care symbols	
Iron	Low iron at max 110°C		
Tumble dry	Do not tumble dry		
Bleach	Do not bleach		
Dry clean P	Dry-cleaning in perchloroethylene gentle cycle		