LANA VELOUR

Wool Blended Velvet

kreateplus.com

designed by technology

OUR STORY

KREATE+ IS A TEXTILE-DESIGN AND TECHNOLOGY COMPANY THAT IS PASSIONATELY FOCUSED ON CREATING CUSTOMISED, HIGH QUALITY AND INNOVATIVE TEXTILE SOLUTIONS FOR A SUSTAINABLE FUTURE THAT ADD EXCEPTIONAL VALUE TO YOUR BUSINESS

/kreateplus


LANA VELOUR




LANA 25_BC24H524




LANA 25_CB24H524

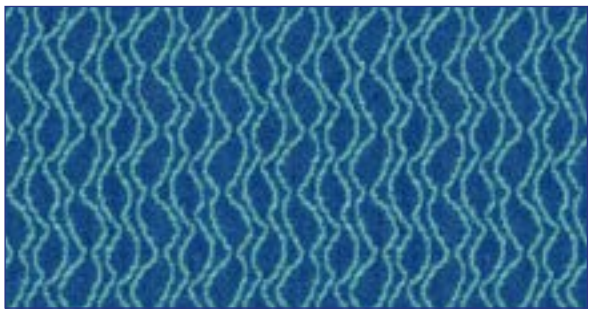


LANA 25_CD24H524

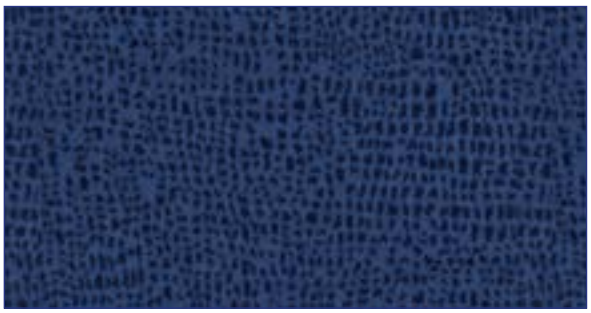


LANA 26_CB24H524

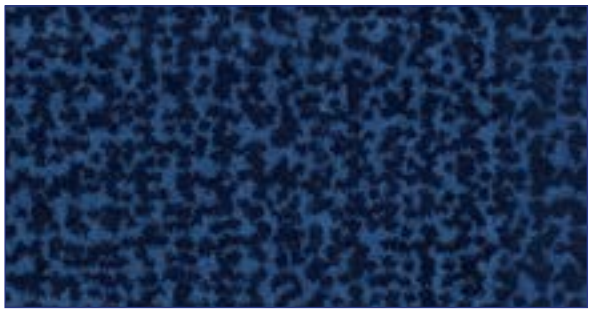


LANA 27_BC24H524

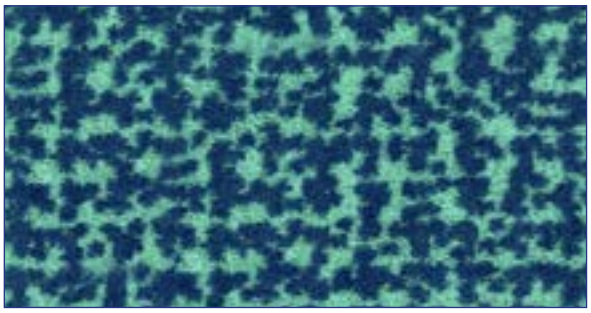


LANA 27_CD24H524

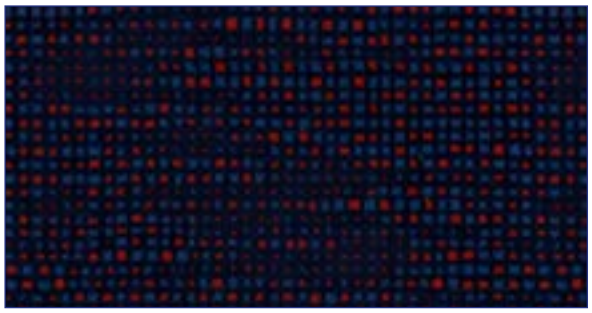


LANA 33_BCA24H524

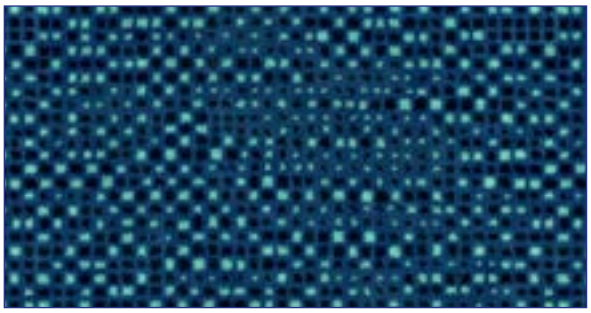

LANA 33_CBD24H524

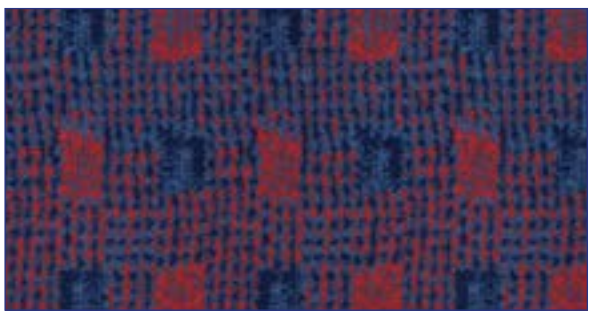

LANA 34_CBA24H524

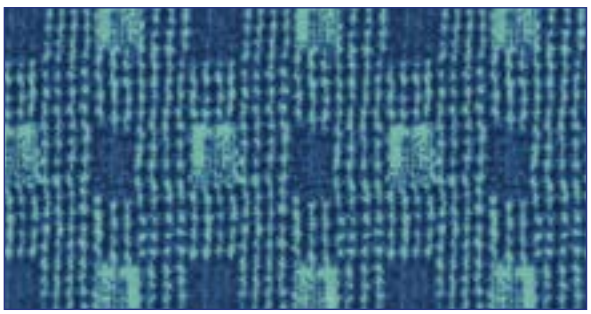

LANA 34_CDB24H524

All our designs are registered and protected against unauthorized copying.


LANA VELOUR



LANA 36_BCD24H524



LANA 36_CBD24H524

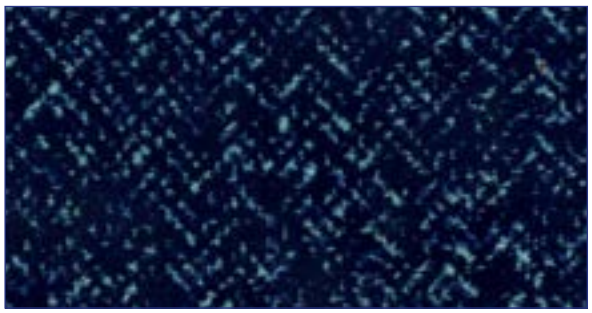

LANA 38_BCD24H524



LANA 40_BCD24H524



LANA 41_BCDA24H524




LANA 41_CDBA24H524



LANA 42_CBDA24H524



LANA-24_CBD24H324

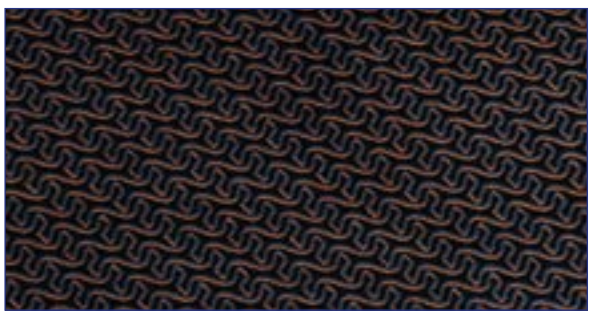


LANA-21_BCD24H324



LANA-23_CBD24H324

All our designs are registered and protected against unauthorized copying.

LANA VELOUR

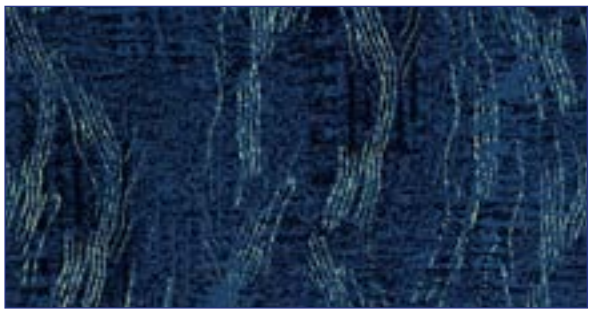

LANA-10_CBD24H224



LANA-11_CBD24H224




LANA-12_BCD24H224



LANA-13_BCD24H224



LANA-13_CB24H324

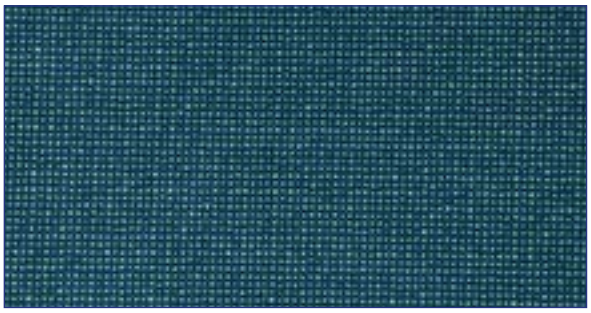

LANA-14_BCD24H224



LANA-14_BCD24H424



LANA-15_BD24H224



LANA-16_BC24H224



LANA-17_CB24H224

All our designs are registered and protected against unauthorized copying.

LANA VELOUR



LANA-17_CD24H224



LANA-18_BC24H224




LANA-18_BC24H324



LANA-18_CB24H224




LANA-19_BC24H224

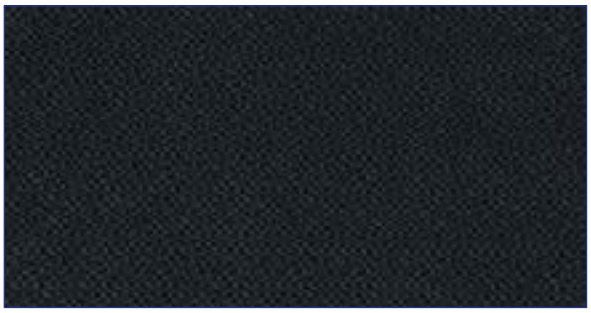


LANA-19_BC24H324



LANA-19_BC24H424

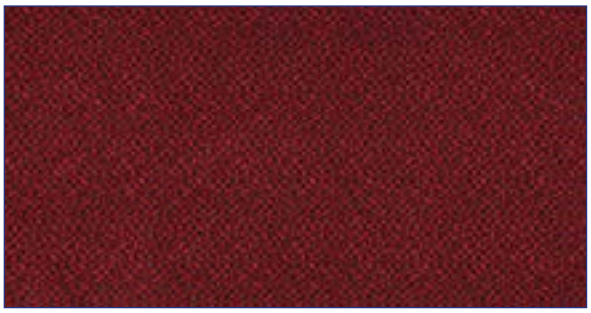

LANA-19_BD24H424

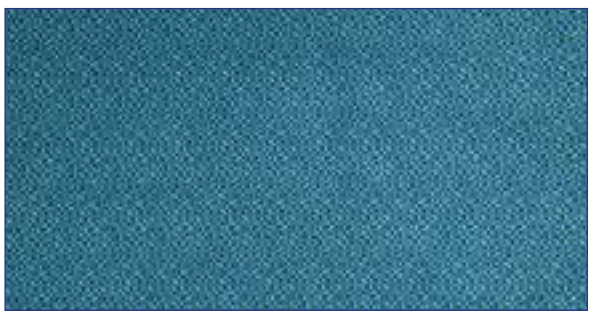

LANA-19_CD24H224



LANA-20_BC24H324

All our designs are registered and protected against unauthorized copying.

LANA VELOUR



LANA-20_BC24H424



LANA-20_CB24H324

All our designs are registered and protected against unauthorized copying.

GENERAL FABRIC INFORMATION					
Quality Name	LANA VELOUR-A	Design Name	LANA 18		
End-Use		Width (±2cm)	154 cm (61")	Weight	640 gr/mt²
Composition	%21 WO %79 PES	Specials			

PHYSICAL TESTS			
Test	**Standarts**	**Results**	
Abrasion End	EN ISO 12947-2	100000	
Wyzenbeek	ASTM D4157		
Martindale-Pilling 2.000 Cycle	EN ISO 12945-2	5	
Brush Pilling	D3511-99A		
Test	**Standarts**	**Warp**	**Weft**
Seam Slippage	EN ISO 13936-2	2	2.5
Tear Strength	EN ISO 13937-3	40	40
Tensile Strength	EN ISO 13934-1	1200	1100
Colour Fastness Rubbing	EN ISO 105-X12(Dry/Wet)	4/5	4/5

FLAMMABILITY TESTS		
Test	**Standarts**	**Results**
Annex 6 Horizontal Burning	ECE R.118 03	PASS
Annex 7 Melting	ECE R.118 03	PASS
Annex 8 Vertical Burning	ECE R.118 03	PASS

REPELLENCY / CLEANABILITY TESTS		
Test	**Standarts**	**Results**
Bleach Cleanable Test	AATCC 101-ACT TM1 With Extra Process	PASS

CARE CODES			
Washable	Do not wash	Care symbols	
Iron	Low iron at max 110°C		
Tumble dry	Do not tumble dry		
Bleach	Do not bleach		
Dry clean P	Do not dry clean		