KREATE+®


designed by technology

LOOM


INHERENT CIGARETTE & MATCH

Crib5 COMPLIANT


Map links

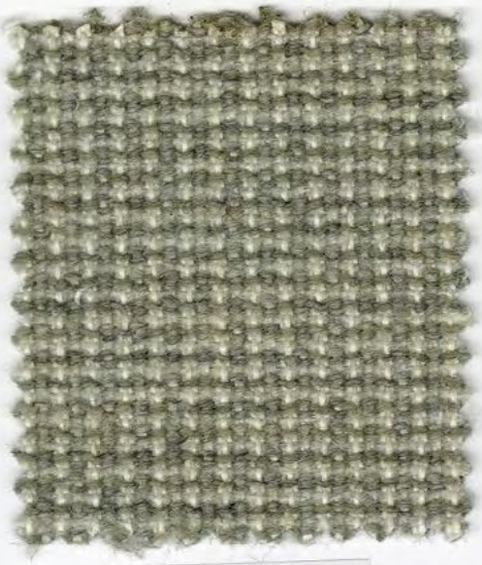


LOOM
A6J5E3

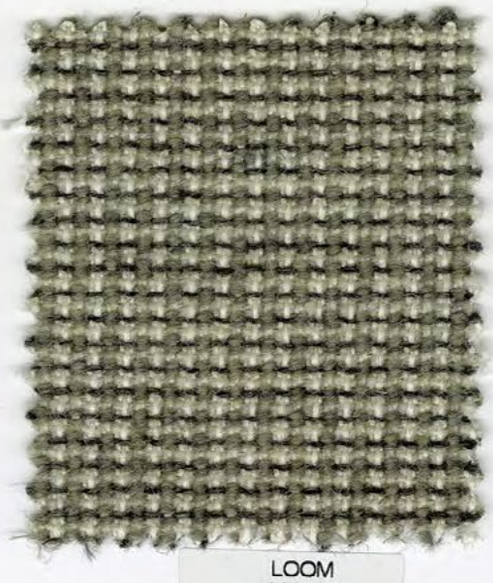

LOOM
A6D6J5

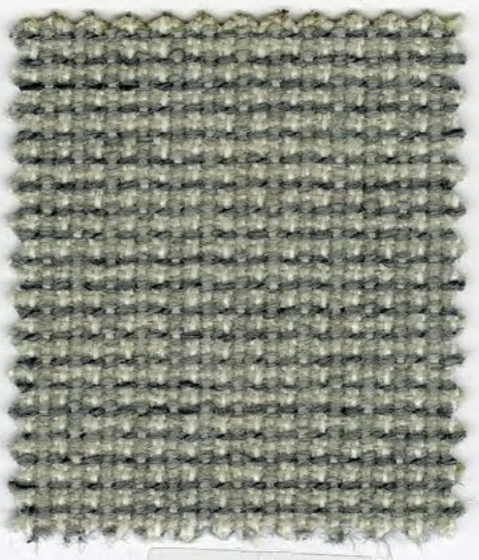

LOOM
A6V329

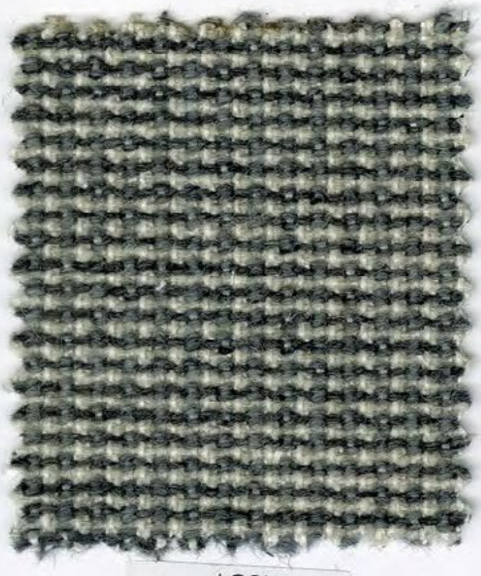

LOOM
A684V3




LOOM
A645CM



LOOM
A66845



LOOM
A6T3T3

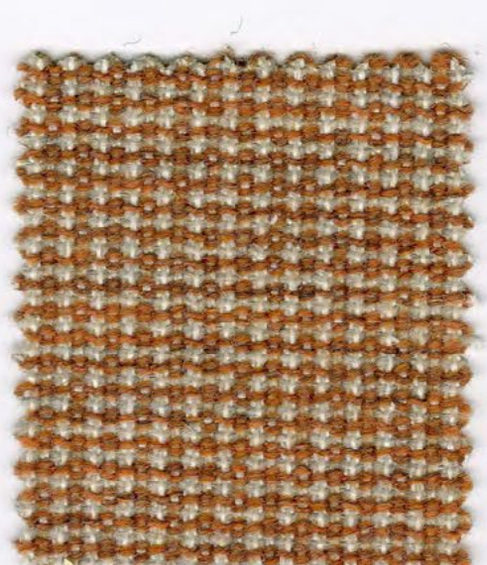

LOOM
A6KCKC



LOOM
A6HSW1


designed by technology

GENERAL FABRIC INFORMATION					
Quality Name	ROLF-V	Design Name	LOOM		
End-Use	CONTRACT - INHERENT FR	Width (±2cm)	133 cm (52")	Weight	584 gr/mt²
Composition	%44 FR WO %2 CO %34 PES %18 FR PA %2 MAC	Specials			

PHYSICAL TESTS			
Test	Standarts	Results	
Abrasion End	EN ISO 12947-2	> 100000	
Wyzenbeek	ASTM D4157		
Martindale-Pilling 2.000 Cycle	EN ISO 12945-2	4/5	
Brush Pilling	D3511-99A	3/4	
Test	Standarts	Warp	Weft
Seam Slippage	EN ISO 13936-2	1.8	2.3
Tear Strength	EN ISO 13937-3	164	252
Tensile Strength	EN ISO 13934-1	1568	2262
Colour Fastness Rubbing	EN ISO 105-X12(Dry/Wet)	4/5	4/5
Colour Fastness Light	EN ISO 105-B04		

FLAMMABILITY TESTS		
Test	Standarts	Results
Cigarette Test	BS 5852 PART 1 SOURCE 0	PASS
Match Testi	BS 5852 PART 1 SOURCE 1	PASS
Crib 5	BS 5852 PART 2 SOURCE 5	PASS
Cigarette Test	EN 1021-1	PASS
Match Testi	EN 1021-2	PASS
Cigarette-Match Test	IMO PART 8	PASS
Cigarette-Match Test	BS 7176 LOW HAZARD	PASS
Cigarette-Match Crib 5 Test	BS 7176 MEDIUM HAZARD	PASS
Cigarette Test	CALL 117	PASS
Cigarette Test	NFPA 260	PASS

REPELLENCY / CLEANABILITY TESTS		
Test	Standarts	Results

CARE CODES			
Washable	Wash 30°C gentle cycle	Care symbols	
Iron	Low iron at max 110°C		
Tumble dry	Do not tumble dry		
Bleach	Do not bleach		
Dry clean P	Dry-cleaning in perchloroethylene gentle cycle		

OEKO TEX STANDARD 100 2106125 Centexbel · Global Recycled Standard Certified by USB Cert. USB TEX2701 · EU Ecolabel · AS 9100 · MED MODULE D

ISO 9001:2015 · ISO 14001:2015 · ISO 45001:2018 · ISO 50001:2018 · Sedex